
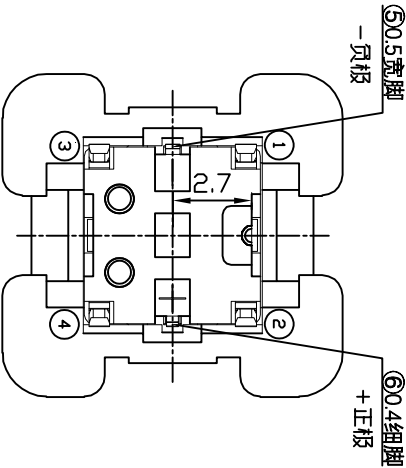
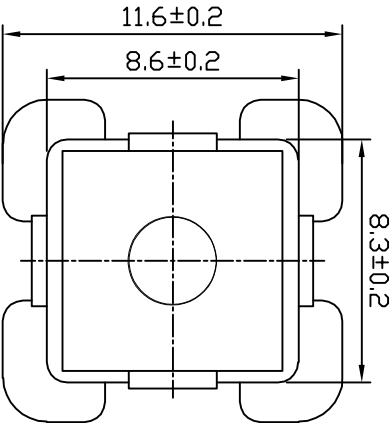


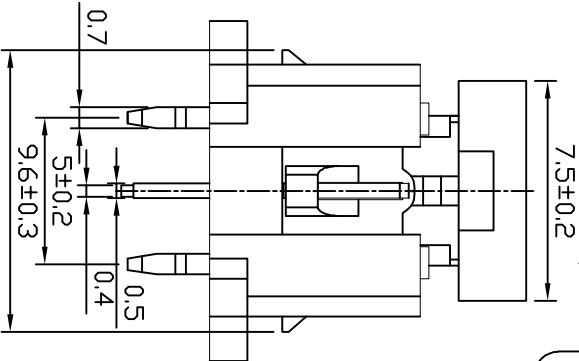


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

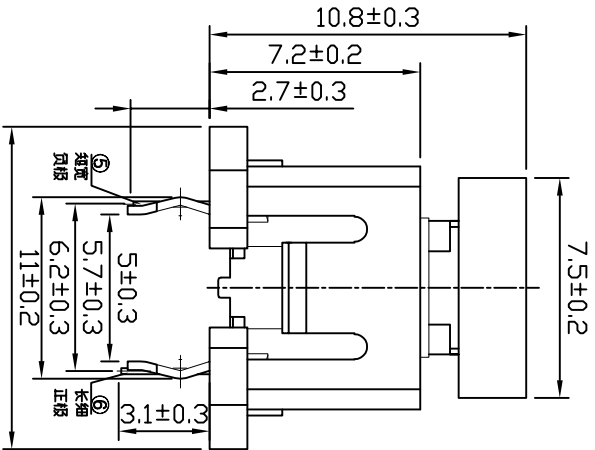

SPECIFICATIONS:

Operating temperature range:-25°C to +75°C
Rating:30V DC, 30mA
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V. AC. 1min
Contact resistance:50mΩ Max
Life:100, 000 Cycles
Travel:0.25±0.1mm
Operating force:160±50gf

灯光	灯光代码
白光	W/white
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	



R&D B140 铭标 COMPLIANT Pb-free RoHS 2024.06.21 ISSUED R&D DEPT				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2024.06.21	TITLE Illuminated Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	LSP664-108J-R
XXX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
✓	±2°	SCALE	4:1			PRINT DATE	2025.02.11