

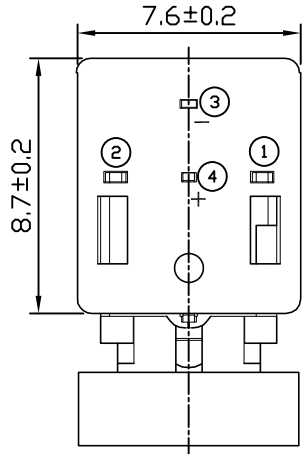
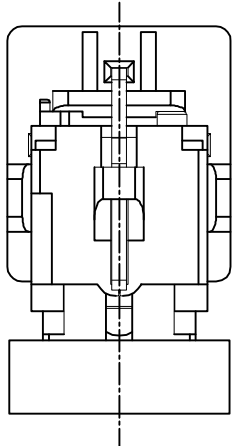
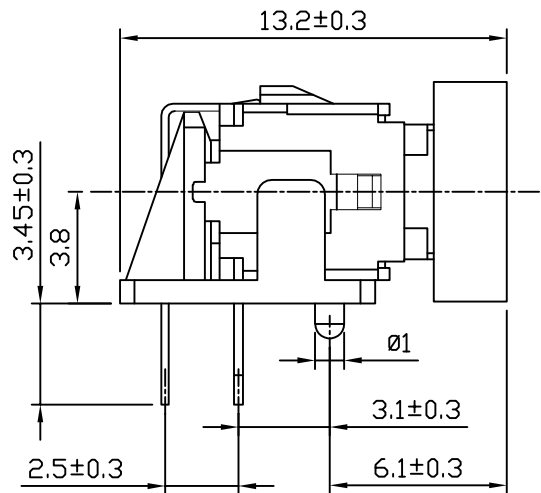


12345678910



A
B
C
D
E
F
G
H

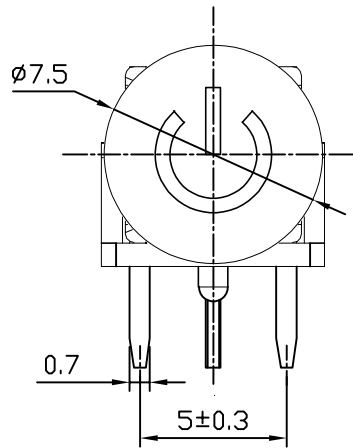

本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

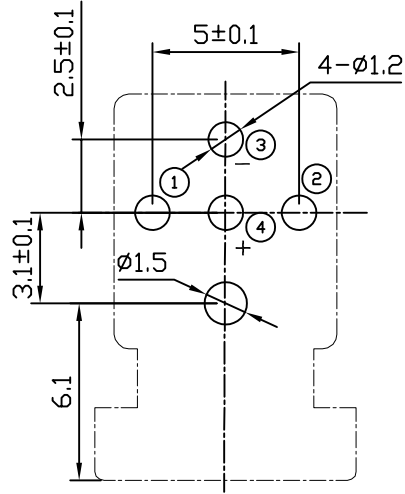

P.C.B LAYOUT

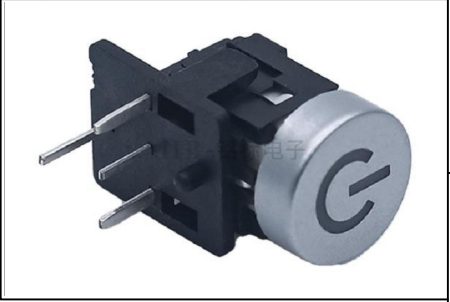

CIRCUIT

SPECIFICATIONS:

Operating temperature range:-25℃to+75℃
Rating:30V DC, 30mA
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:50mΩ Max
Life:100,000 Cycles
Travel:0.25±0.1mm
Operating force:160±50gf

灯光	灯光代码
白光	W White
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	



ROHS COMPLIANT Pb Pb-Free HF Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Illuminated Switch	
UNLESS OTHERWISE STATED				WYJ	2024. 06. 22			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LSP670-132J-R	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	4:1			PRINT DATE	2025.02.11	