本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.



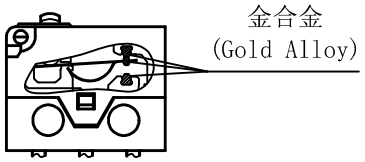

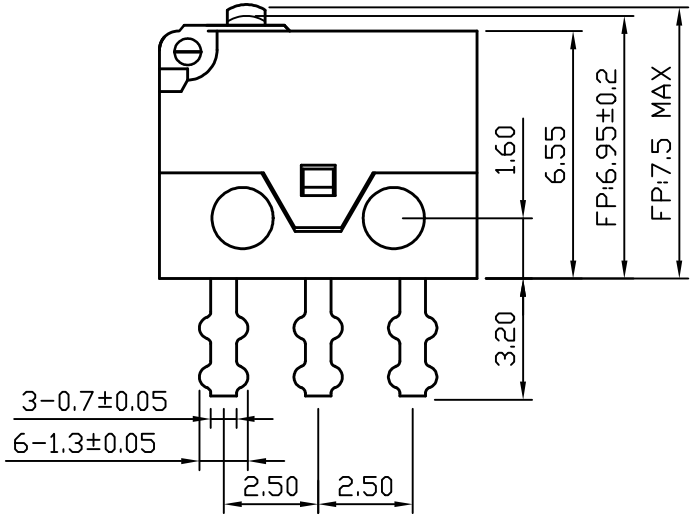

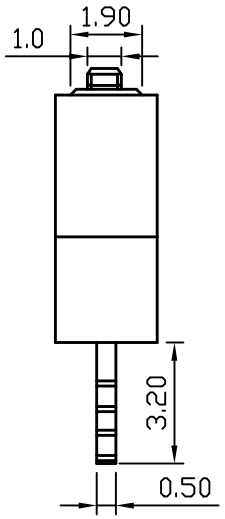

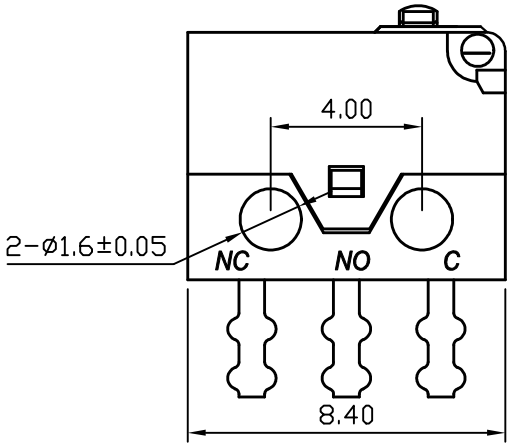



CIRCUIT

Rating	DC30V 3A	Electrical Life	20,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	100gf Max

序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes
7				
6	端子(TERMINAL)	3	C2680(Brass)	镀银(Silver plating)
5	触点(CONTACT)	4	金合金 (Gold Alloy)	
4	按钮(BUTTON)	1	PBT	
3	弹片(SPRING)	1	C17200(Beryllium copper)	
2	盖片(COVER)	1	尼龙 (Nylon)	
1	底座 (BASE)	1	尼龙 (Nylon)	米白色

MING BIAO 铭标 2024.12.12 ISSUED R&D DEPT

RoHS COMPLIANT Pb Pb-Free Halogen Free

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co. ,Ltd.

TOLERANCE UNLESS OTHERWISE STATED				DESIGN	DATE	TITLE	超小型金微动开关（2.7井深）
X.X	±0.20	SIZE	A4	WYJ	2024. 12. 12		
X.XX	±0.15	REV	A	CHKD	DATE	MODEL	DH-3-00P-60-3
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
∡	±2°	SCALE	5:1			PRINT DATE	2025.02.28