
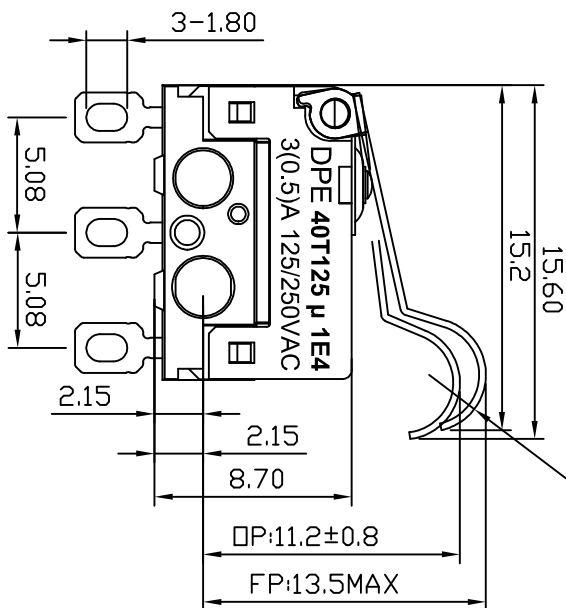
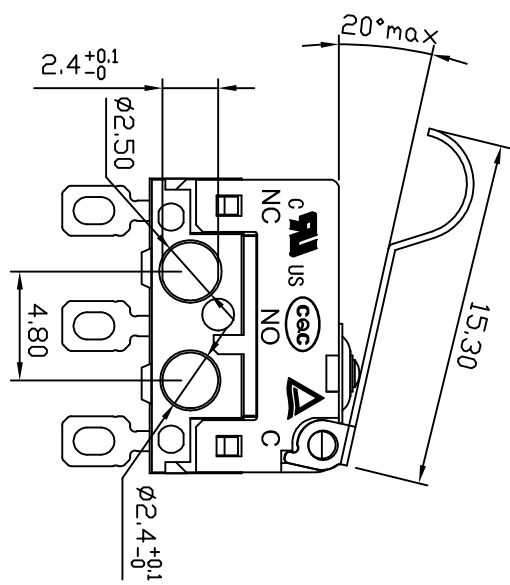
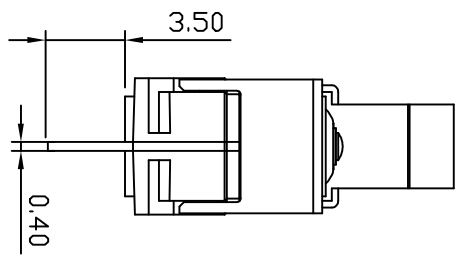




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

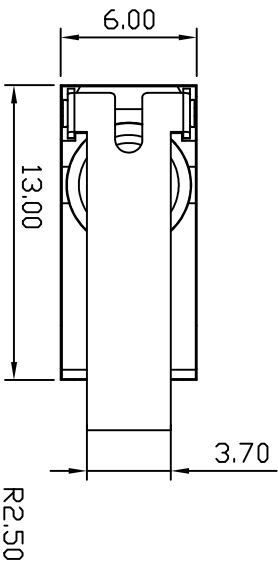

Rating	3A DC48V	Electrical Life	30,000 cycles
	3A 125VAC		10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf max

说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。

9	压柄	1	SUS	
8	密封垫	1	TPPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



RoHS COMPLIANT Pb-free		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		2024.12.12		2024.12.12		DP系列 密封型 超小型 微动开关	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DPE-D-05N
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	DATE	DATE	PRINT DATE	2025.02.28
±2°	SCALE	3:1					

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

