

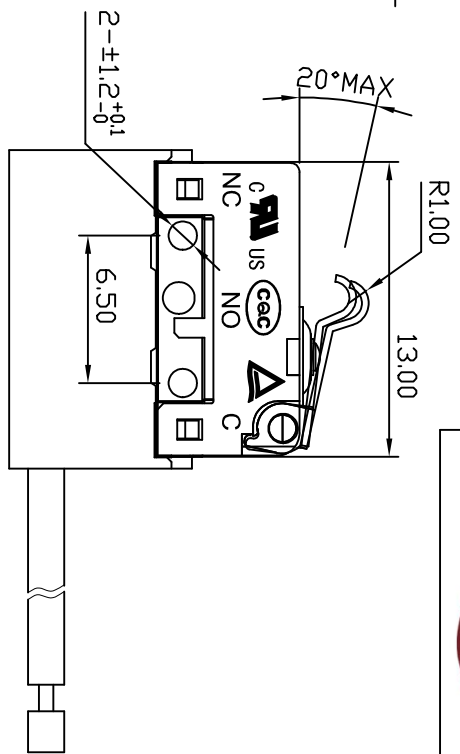
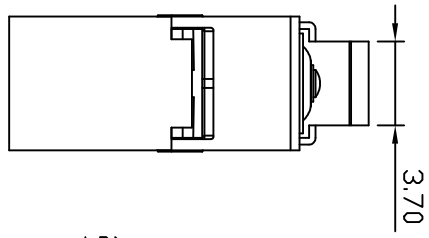
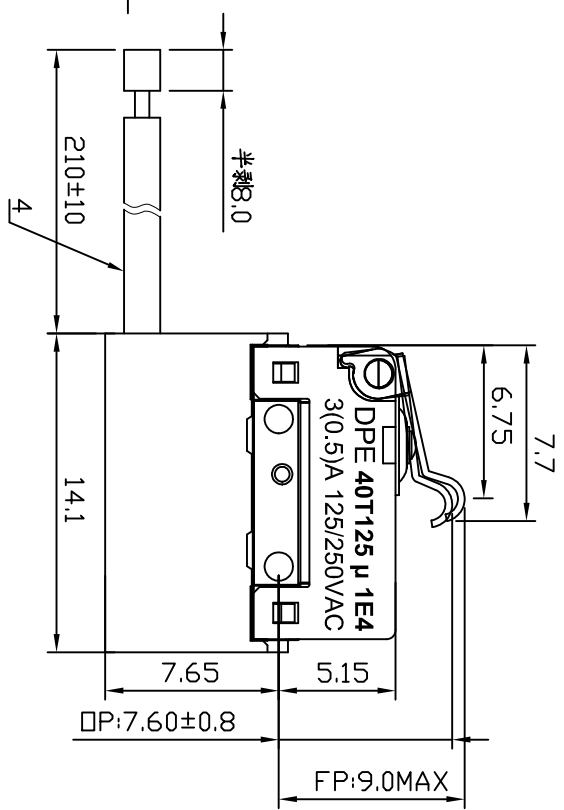



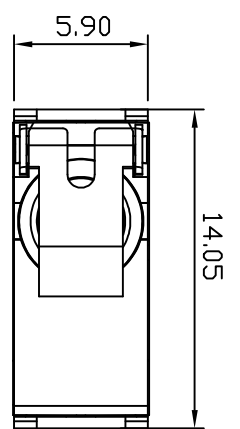

地线PE(黑色)

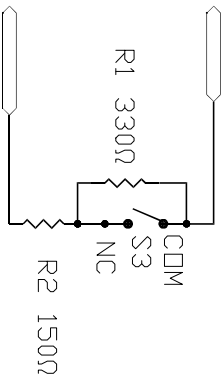

充电连接确认CC (灰色)
自然状态下: 开关为常闭, 电阻为: R2=150 欧姆
按压状态下: 开关切换后, 电阻为: R1+R2=480 欧姆

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



Rating	3A 48VDC	Electrical Life	30,000 cycles
Contact Resistance	3A 125VAC	Electrical Life	10,000 cycles
Insulation Resistance	100mΩ Max	Mechanical Life	1,000,000 cycles
Withstand Voltage	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Soldering Temper.	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Operating Force	238±5℃ 5s	Operating Force	100gf max
说明	利用橡胶封装的密封结构实现防尘防水 (IEC IP67)。		

TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	CHKD	DATE	TITLE	MODEL
X.XX	±0.15	REV	A		2024.12.12	DP 密封型小型微动开关 带线带电阻	DPE-X-07P-BV-RC 330/150
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
±	±2°	SCALE	3:1		PRINT DATE	2025.02.28	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

