
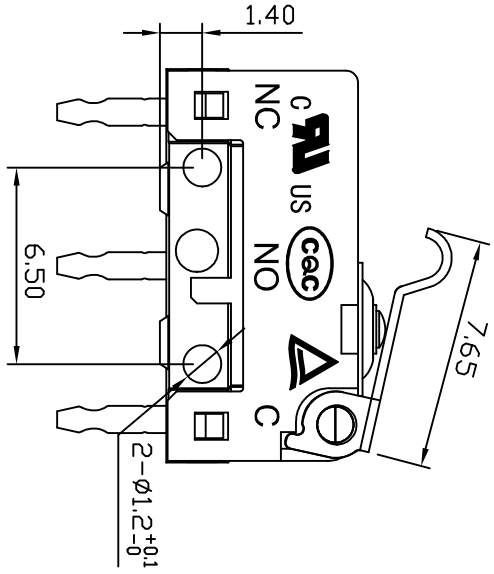
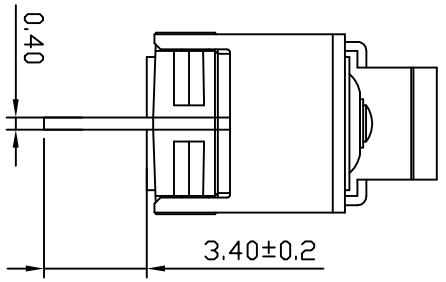
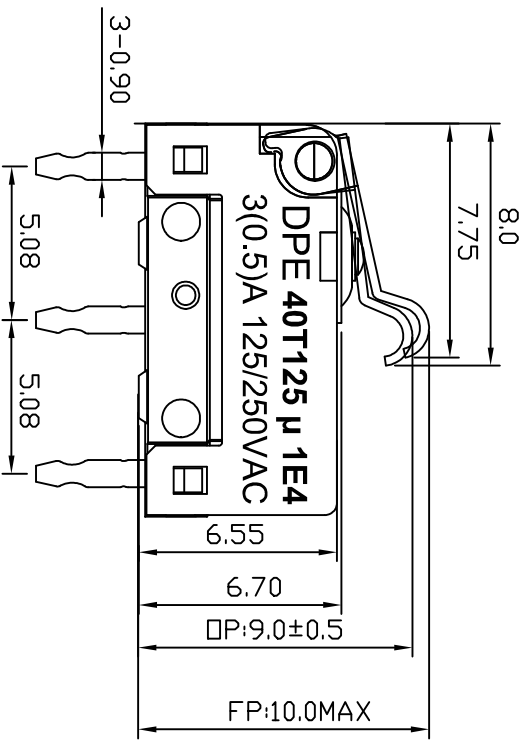




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

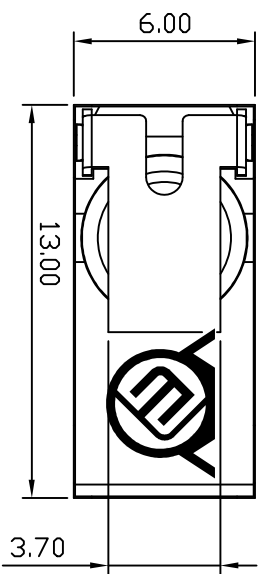

Rating	3A DC48V 3A 125VAC	Electrical Life	30,000 cycles 10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	110gf max

说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。

9	压柄	1	SUS	
8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



TOLERANCE		DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED		Ming Biao		2024.12.12		DP 密封型小型微动开关	
X.X	±0.20	SIZE	A4	DATE		MODEL	
X.XX	±0.15	REV	A	DATE		DPE-X-07P	
X.XXX	±0.10	UNIT	mm	DATE		SHEET	
△	±2°	SCALE	4:1	DATE		PRINT DATE	
						1/3	
						2025.02.28	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.