


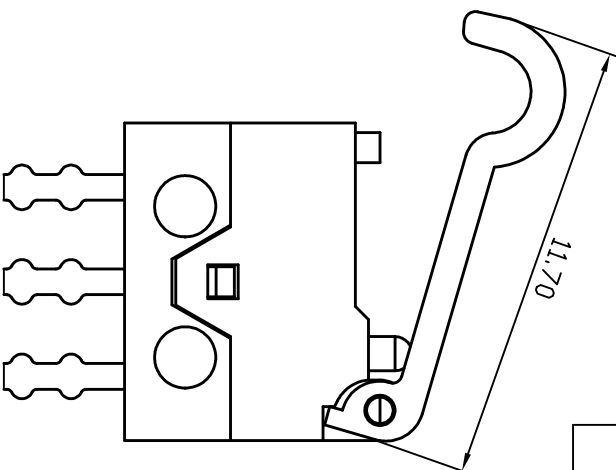
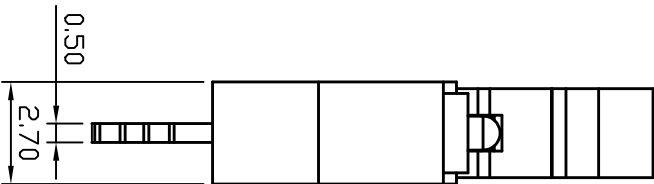
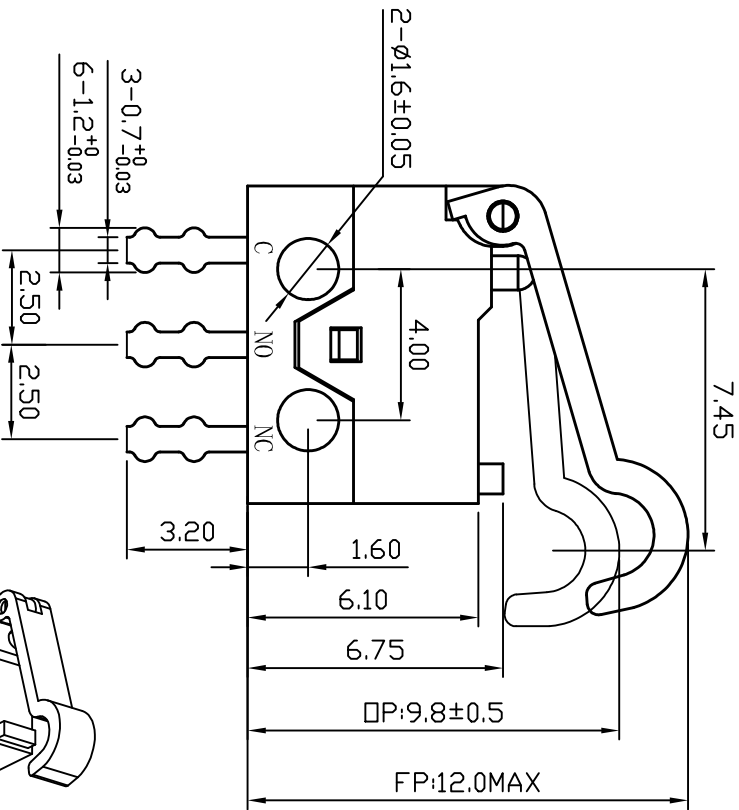


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

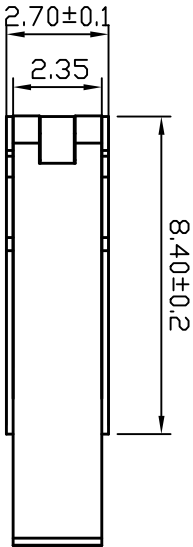

Rating	DC30V 100mA	Electrical Life	1,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	1,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	30±20gf max



7	压柄 (LEVER)	1	尼龙 (Nylon)	
6	端子 (TERMINAL)	3	C2680 (Brass)	镀银 (Silver plating)
5	触点 (CONTACT)	1	银合金 (Silver Alloy)	
4	按钮 (BUTTON)	1	PBT	
3	弹片 (SPRING)	1	C17200 (Beryllium copper)	
2	盖片 (COVER)	1	尼龙 (Nylon)	
1	底座 (BASE)	1	尼龙 (Nylon)	
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes



Rohs COMPLIANT Pb-free		DESIGN		DATE	TITLE
UNLESS OTHERWISE STATED		CHKD		2024.12.12	超小型微动开关 (2.7井深)
X.X	±0.20	SIZE	A4	DATE	MODEL
X.XX	±0.15	REV	A	DATE	DS027-02P-30-3
X.XXX	±0.10	UNIT	mm	DATE	SHEET
△	±2°	SCALE	5:1	DATE	PRINT DATE
东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.		DATE		1/3	
				2025.02.28	