


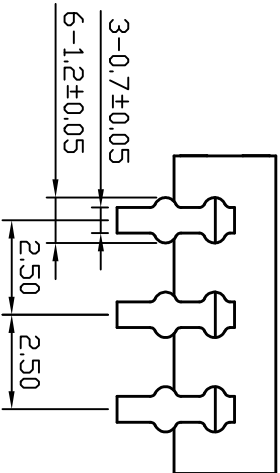

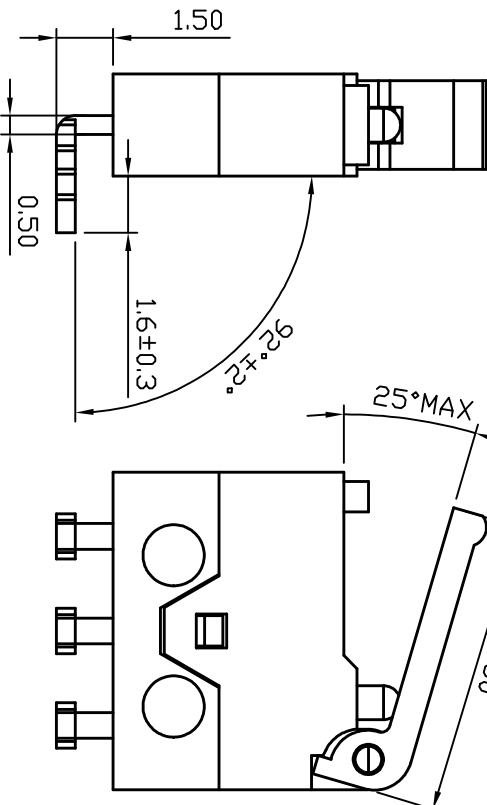


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

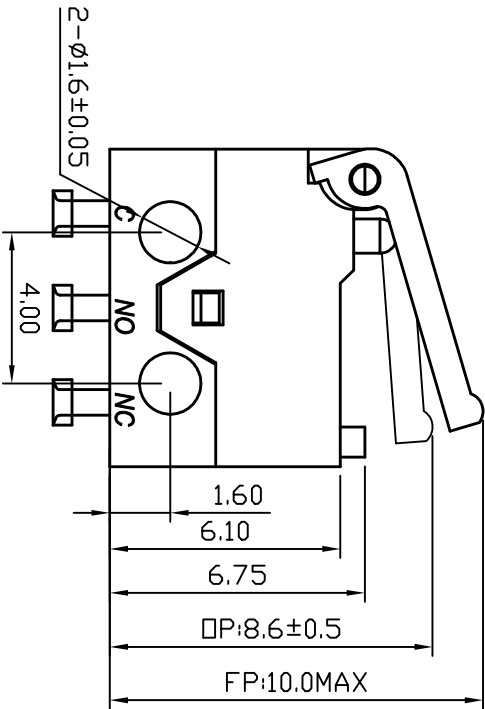

Rating	DC30V 0.1A	Mechanical Life	300,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	40gf max

7	压柄 (LEVER)	1	尼龙 (Nylon)		
6	端子 (TERMINAL)	3	C2680 (Brass)	镀银 (Silver plating)	
5	触点 (CONTACT)	1	银合金 (Silver Alloy)	双面镀金	
4	按钮 (BUTTON)	1	PPt		
3	弹片 (SPRING)	1	Cl7200 (Beryllium copper)		
2	盖片 (COVER)	1	尼龙 (Nylon)		
1	底座 (BASE)	1	尼龙 (Nylon)	白色	
序号	零件名称	数量	材料	备注	
NO.	Part Name	Quantity	Material	Notes	

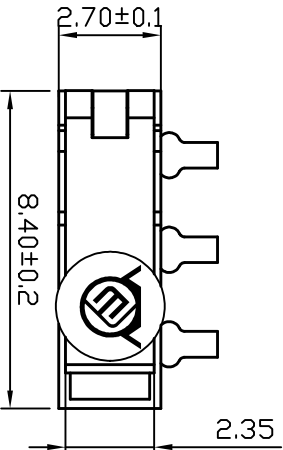

RoHS COMPLIANT Pb-free			DESIGN DATE 2024.12.12		
TOLERANCE UNLESS OTHERWISE STATED			TITLE 超小型微动开关 (2.7井深 高寿命)		
X.X	±0.20	SIZE A4	CHKD	DATE	MODEL DS027-1-01CR-15-3
X.XX	±0.15	REV A		DATE	
X.XXX	±0.10	UNIT mm	APPD	DATE	
±	±2°	SCALE 3:1		SHEET 1/3	PRINT DATE 2025.02.28

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.