


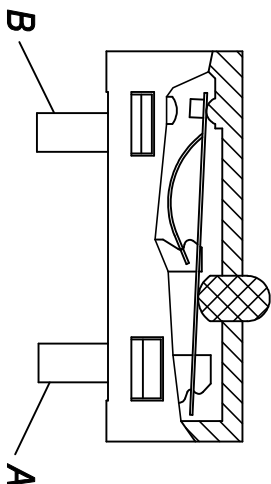
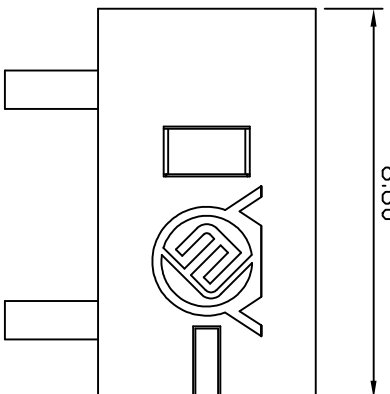



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

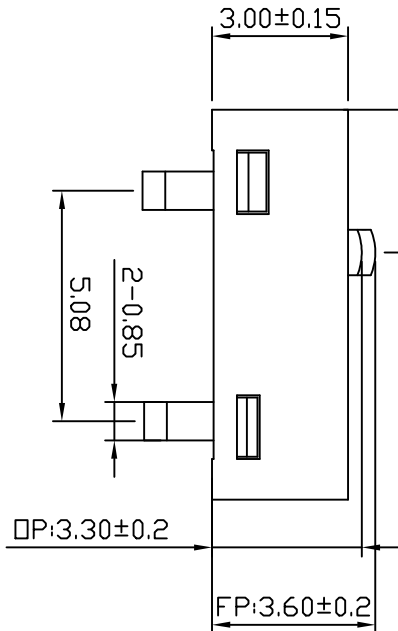

CIRCUIT

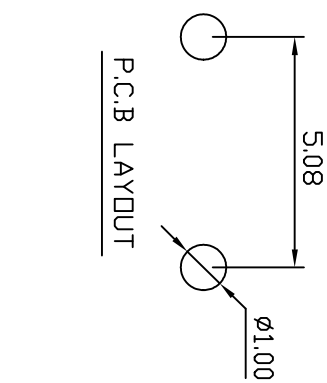

Rating	DC30V 0.1A	Electrical Life	5,000,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	5,000,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +70℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	255±5℃ 5s	Operating Force	90gf MAX



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.12.12	超小型微动开关(左弯脚)
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL
X.XX	±0.15	REV	A			DS036-00CL-60-5
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET
△	±2°	SCALE	6:1			1/3
					PRINT DATE	2025.02.28

