
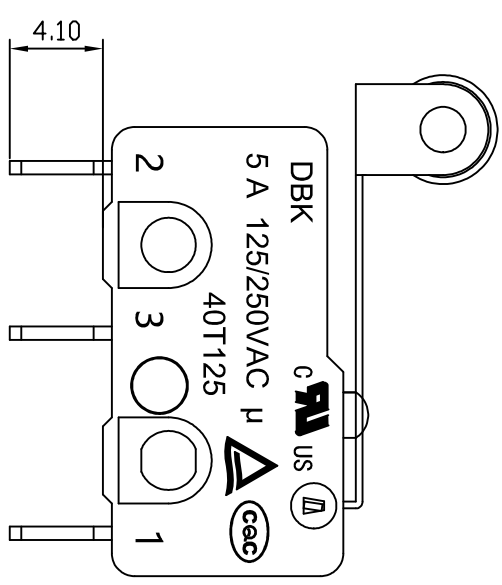
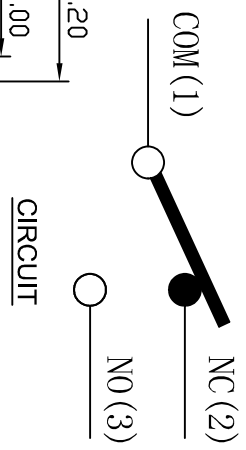
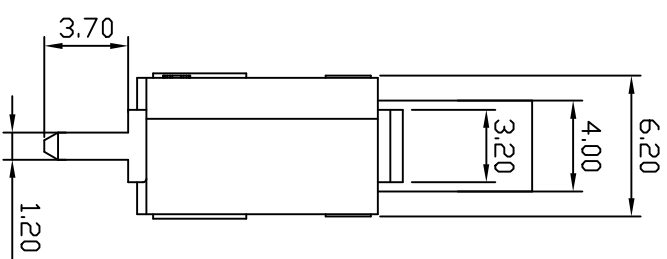
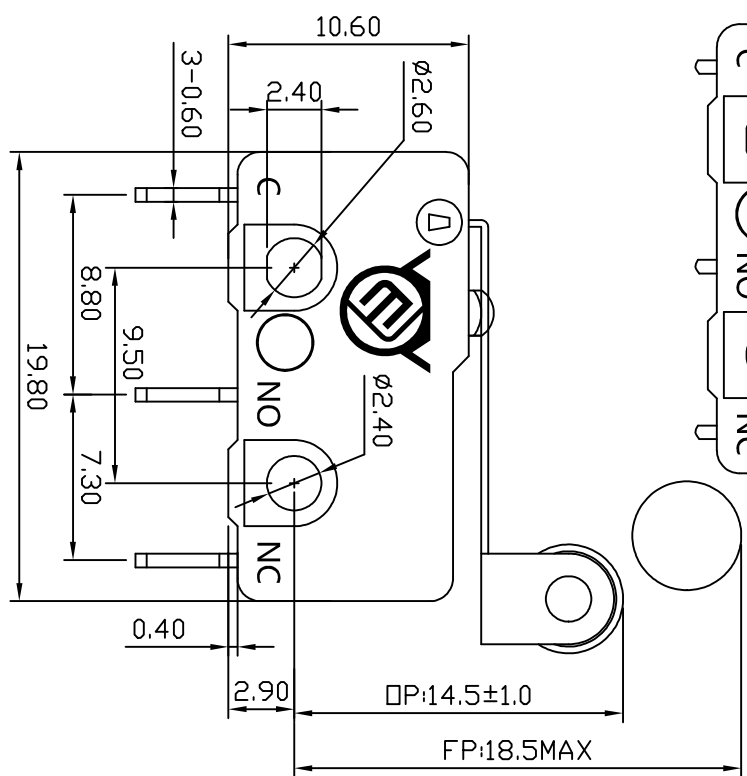


12345678910

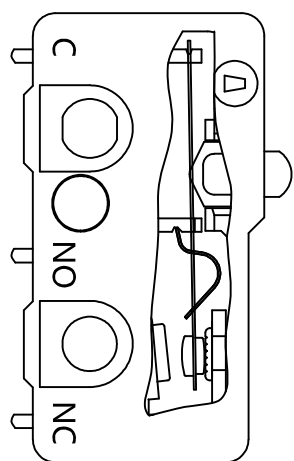

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	50,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	70gf MAX

ROHS COMPLIANT

Pb Free

Hongyi Free

东莞市铭标电子科技有限公司

Ming Biao Electronic Technology Co., Ltd.



序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes
11	压柄 (Lever)	1	SUS	
10	铆钉 (Rivet)	1	AL	
9	触点 (CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2680	
5	NC端子 (NC TERMINAL)	1	C2680	
4	COM端子 (COM TERMINAL)	1	C2680	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0

TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.12.12	DB系列微动开关	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DBK-50P-40-2
X.XX	±0.15	REV	A		DATE		
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	3:1			PRINT DATE	2025.02.28