


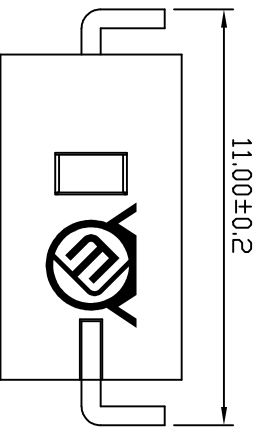
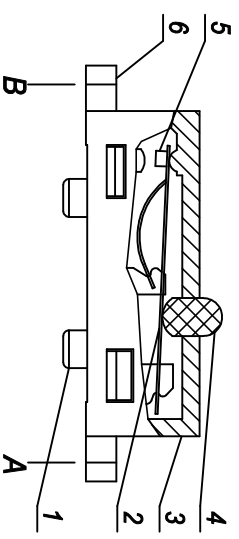




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

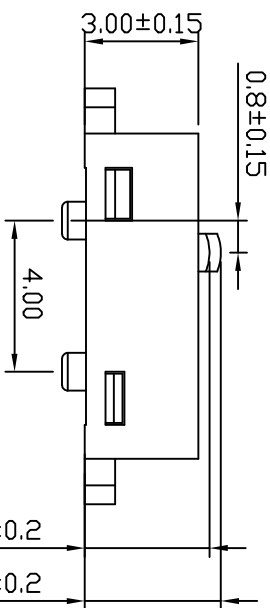

CIRCUIT

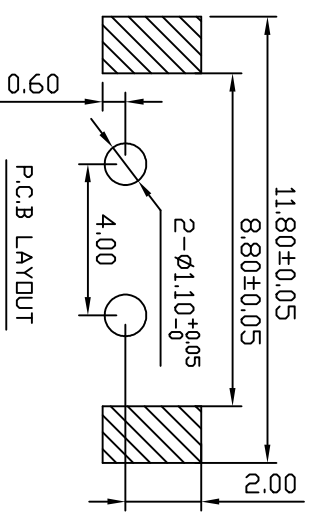

□P:3.30±0.2
FP:3.60±0.2

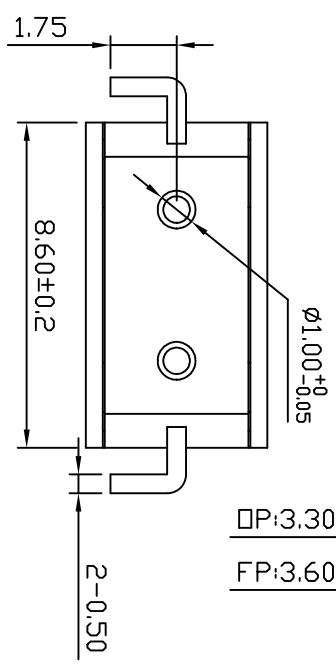

Rating	DC30V 0.1A	Electrical Life	5,000,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	5,000,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +70℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	255±5℃ 5s	Operating Force	90gf MAX

RoHS COMPLIANT

Pb-free

RoHS

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



TOLERANCE				DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED				WYJ	2024.12.12	超小型微动开关(贴片式)

6	端子	2	C2680	镀银
5	触点	1	银合金	
4	按钮	1	高温尼龙	
3	盖片	1	高温尼龙	
2	弹片	1	CI17200	
1	底座	1	高温尼龙	
序号	零件名称	数量	材质	备注

X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	DS036-00M-60-5
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	5:1			PRINT DATE	2025.02.28

