

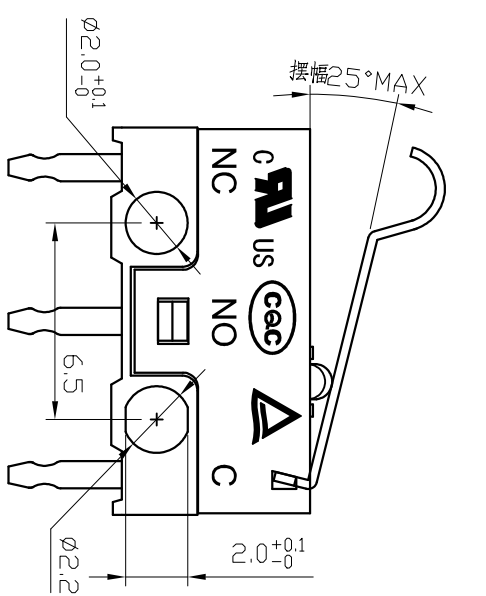
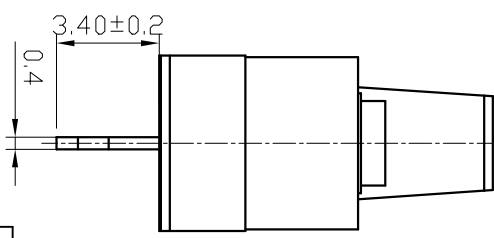
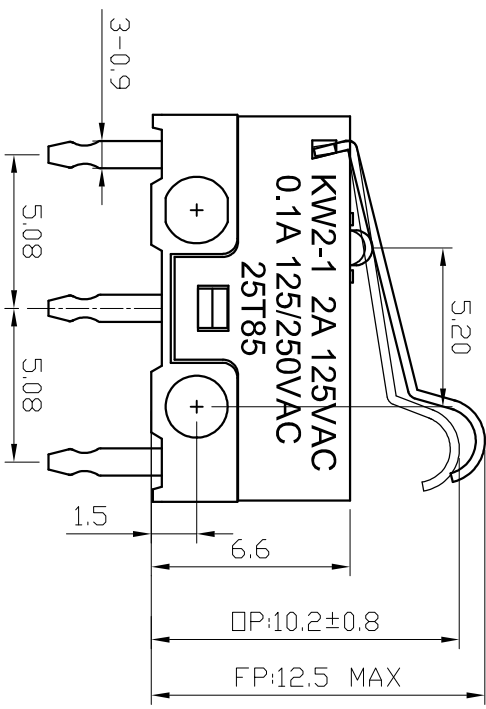



本公司智慧财产未经许可不得复制  
ming biao copyright may not be used without permission from ming biao

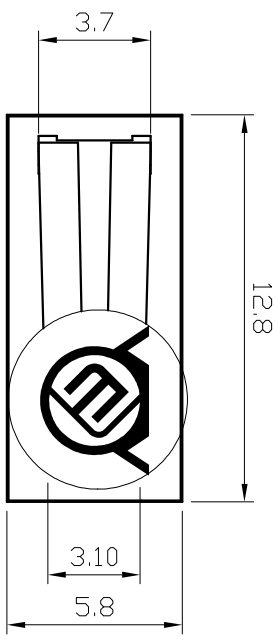

UL E508056

TUV R50440595

CQC19002225484

安全认证证书

|    |      |    |             |      |
|----|------|----|-------------|------|
| 7  | 压柄   | 1  | SUS         |      |
| 6  | 端子   | 3  | C2680       | 镀银   |
| 5  | 触点   | 3  | 金合金         |      |
| 4  | 按钮   | 1  | PBT UL94 V0 |      |
| 3  | 弹片   | 1  | C17200      | 进口镀铜 |
| 2  | 盖片   | 1  | PBT UL94 V0 | 绿松石色 |
| 1  | 底座   | 1  | PBT UL94 V0 |      |
| 序号 | 零件名称 | 数量 | 材质          | 备注   |



|                                                                                         |       |                                                                                                                                                            |                                                                                               |                       |                |               |  |
|-----------------------------------------------------------------------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------|----------------|---------------|--|
| Rating                                                                                  |       | 0.1A 125/250V                                                                                                                                              |                                                                                               | Electrical Life       |                | 50,000 cycles |  |
| Contact Resistance                                                                      |       | 2A 125VAC                                                                                                                                                  |                                                                                               | Mechanical Life       |                | 10,000 cycles |  |
| Insulation Resistance                                                                   |       | 100mΩ Max                                                                                                                                                  |                                                                                               | Ambient Temper. Used  |                | -25℃ to +85℃  |  |
| Withstand Voltage                                                                       |       | >100MΩ DC500V                                                                                                                                              |                                                                                               | Ambient Humidity Used |                | ≤85% at +40℃  |  |
| Soldering Temper.                                                                       |       | AC500V 1min.                                                                                                                                               |                                                                                               | Operating Force       |                | 60gf max      |  |
| 说明: 1: KW-1系列金微动系列, 针对微小负载电路(DC5V 1mA-DC30V 100mA) 环境下的导通可靠性设计。<br>2: 能承担 2A 125VAC应用场景 |       |                                                                                                                                                            |                                                                                               |                       |                |               |  |
| <div>ROHS COMPLIANT</div> <div>Pb Free</div> <div>RoHS Free</div>                       |       | <div> 东莞市铭标电子科技有限公司<br/>Ming Biao Electronic Technology Co., Ltd.</div> |                                                                                               |                       |                |               |  |
| TOLERANCE                                                                               |       |                                                                                                                                                            | DESIGN                                                                                        | DATE                  | TITLE          | KW-1系列 金微动    |  |
| UNLESS OTHERWISE STATED                                                                 |       |                                                                                                                                                            | WJF                                                                                           | 2024.12.12            | KW2-1-05P-30-5 |               |  |
| X.X                                                                                     | ±0.20 | SIZE                                                                                                                                                       | CHKD                                                                                          | DATE                  | MODEL          | 1/3           |  |
| X.XX                                                                                    | ±0.15 | REV                                                                                                                                                        |                                                                                               |                       |                | PRINT DATE    |  |
| X.XXX                                                                                   | ±0.10 | UNIT                                                                                                                                                       | APPD                                                                                          | DATE                  |                | 2025.02.28    |  |
| ±2°                                                                                     | SCALE | 4:1                                                                                                                                                        | <div></div> |                       |                |               |  |