


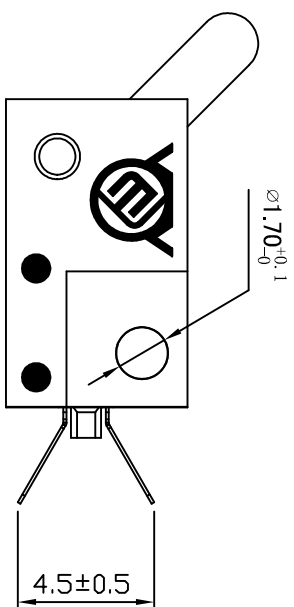


3.90min DN starting Position




CIRCUIT

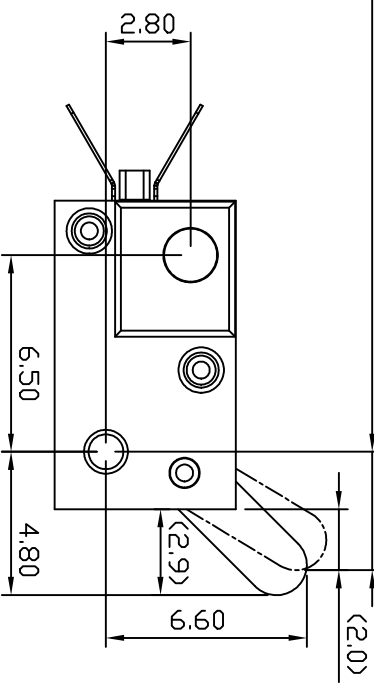

金触点

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

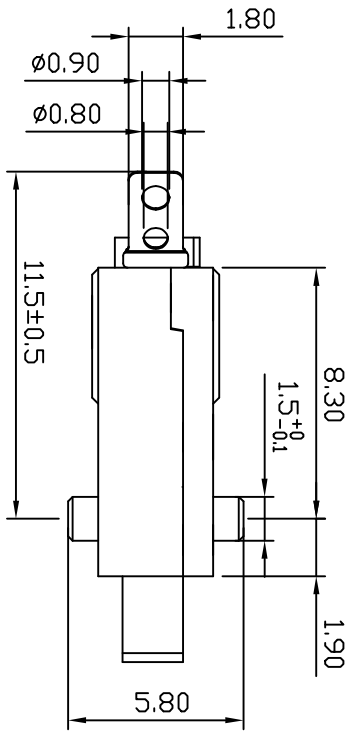

Rating	0.1A DC30V	Electrical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Mechanical life	1,000,000 cycles
Insulation Resistance	>50MΩ DC250V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	70gf max

5	触点	2	Gold Alloy	
4	按钮	1	PBT UL94 V0	
3	弹片	2	C17200	
2	上盖	1	PBT UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



R&D DEPT				2024.12.12				ISSUED				铭标			
COMPLIANT				Pb-free				RoHS				Ming Biao			
TOLERANCE				UNLESS OTHERWISE STATED				DESIGN				DATE			
X.X				±0.20				SIZE				A4			
X.XX				±0.15				REV				A			
X.XXX				±0.10				UNIT				mm			
A				±2°				SCALE				4:1			
Ming Biao				Ming Biao				DATE				2024.12.12			
Ming Biao				Ming Biao				TITLE				LS 检知型微动开关			
Ming Biao				Ming Biao				MODEL				LS-01N			
Ming Biao				Ming Biao				SHEET				1/3			
Ming Biao				Ming Biao				PRINT DATE				2025.02.28			