


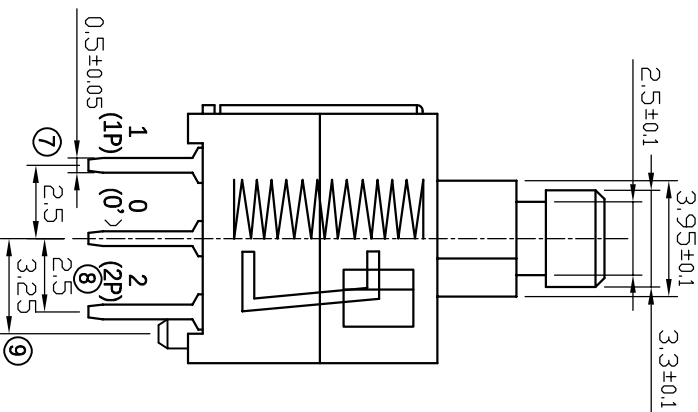
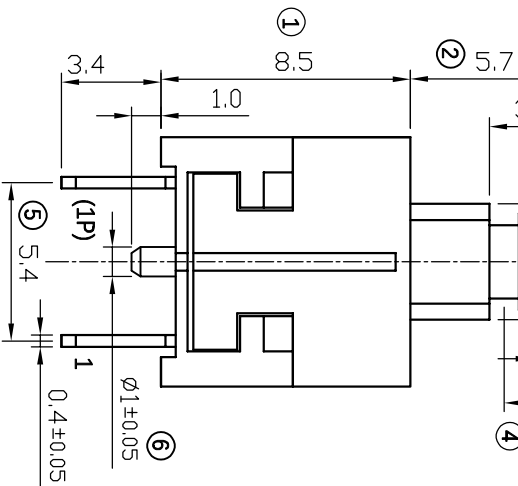
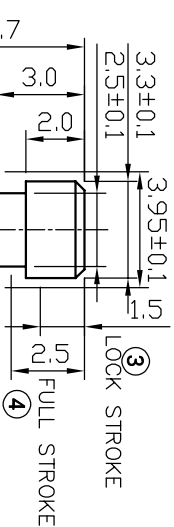


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

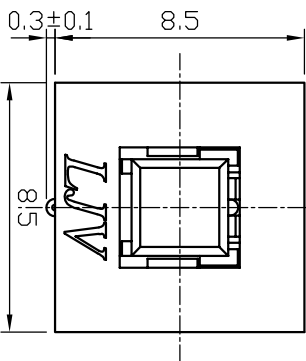

CIRCUIT

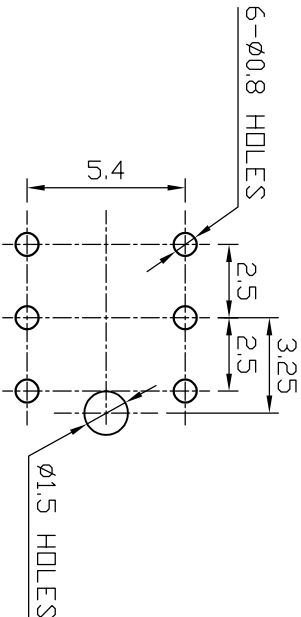

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 100mA, 30V DC Max
Insulation resistance: 100MΩ min, 500V DC
Dielectric strength: 500V AC for 1Min
Contact resistance: 50mΩ Max
Life: 100,000 Cycles
Travel: 1.5±0.3mm
Operating force: 240±50gf



RoHS COMPLIANT Pb Pb-free Hf Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.					
TOLERANCE				DESIGN		DATE			
UNLESS OTHERWISE STATED				WJL		2024.09.27		TITLE	
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	±0.15	REV	A					PS8508	
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET	
✓	±2°	SCALE	4:1					1/3	
						PRINT DATE		2025.02.11	