


CIRCUIT



Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temp. Used	-25°C to +125°C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40°C
Soldering Temper.	235±5°C 5s	Operating Force	40 ±20gf

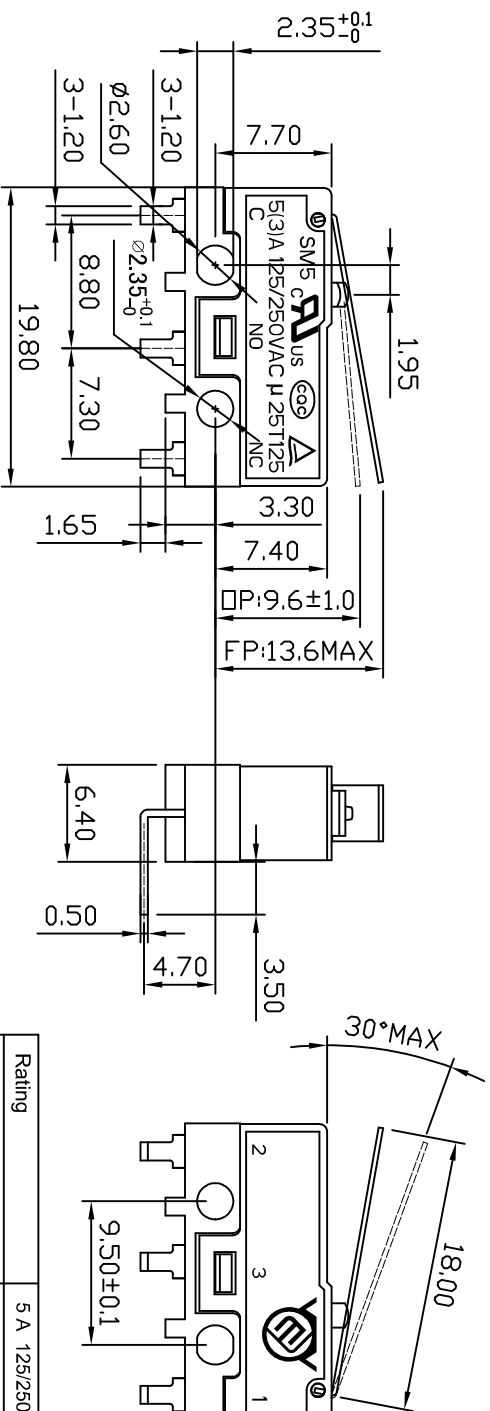

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd

TOLERANCE			DESIGN	DATE	TITLE	中型微动开关	
UNLESS OTHERWISE STATED			WJG	2024. 12. 12			
X.X	±0.20	SIZE	A4				
X.XX	±0.15	REV	A	DATE	MODEL	SM5-01CR-40-3	
X.XXX	±0.10	UNIT	mm	DATE	SHEET	1/3	
∠	±2°	SCALE	2:1		PRINT DATE	2025.02.28	

