


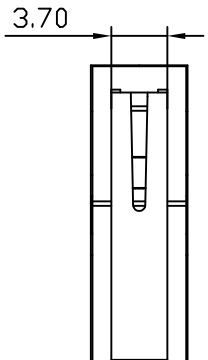
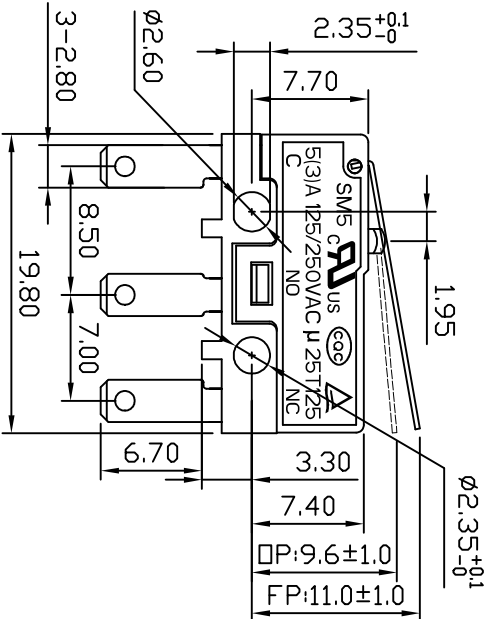


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

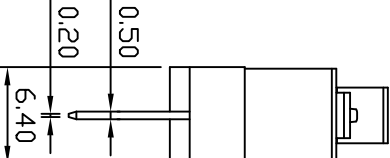

CIRCUIT

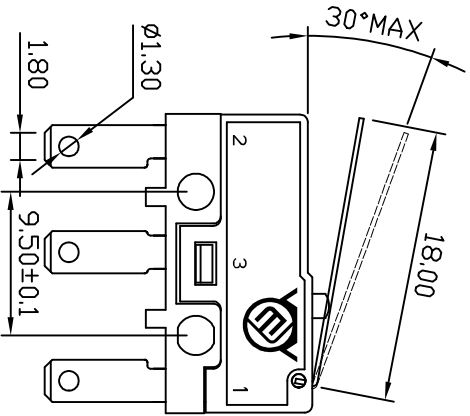

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25°C to +125°C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40°C
Soldering Temper.	235±5°C 5s	Operating Force	40 ±20gf



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

2024.12.12

ISSUED



TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	CHKD	DATE	TITLE	中型微动开关
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	MODEL	SM5-01K-40-3(110快接端子)
	±2°	SCALE	2:1			SHEET	1/3
						PRINT DATE	2025.02.28