

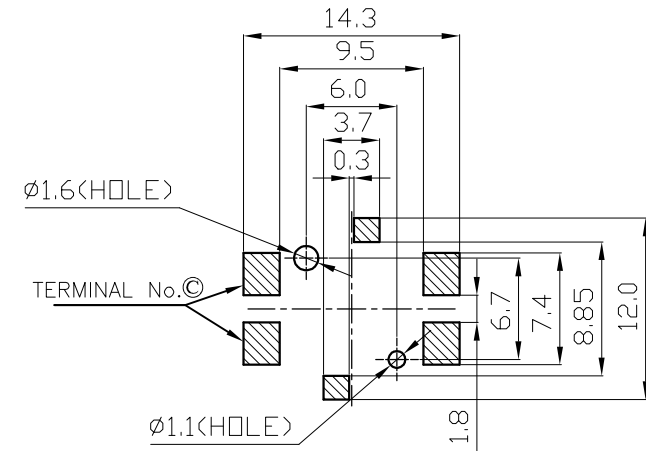
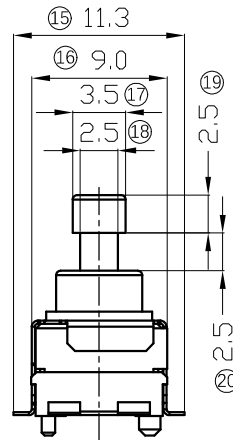
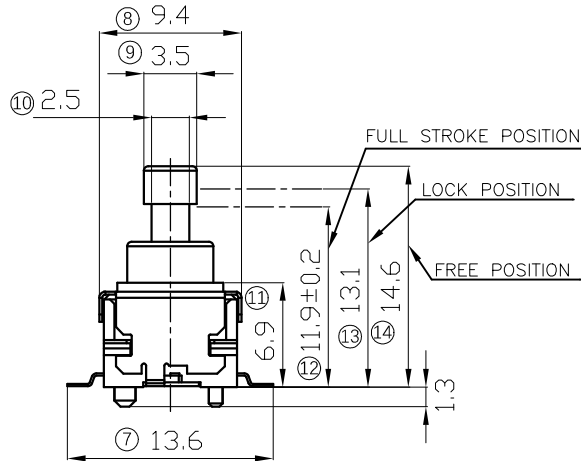


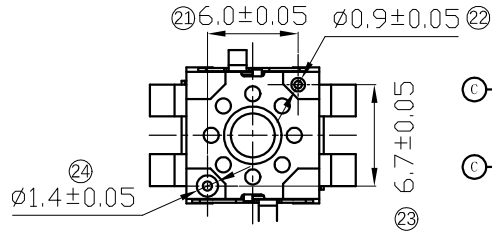

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 50mA, 12V DC Max
Insulation resistance: 3MΩ min. 100V DC
Dielectric strength: 100V AC for 1Min
Contact resistance: 100mΩ Max
Life: 30,000 Cycles
Travel: 2.7mm
Operating force: 300±70gf/500±100gf

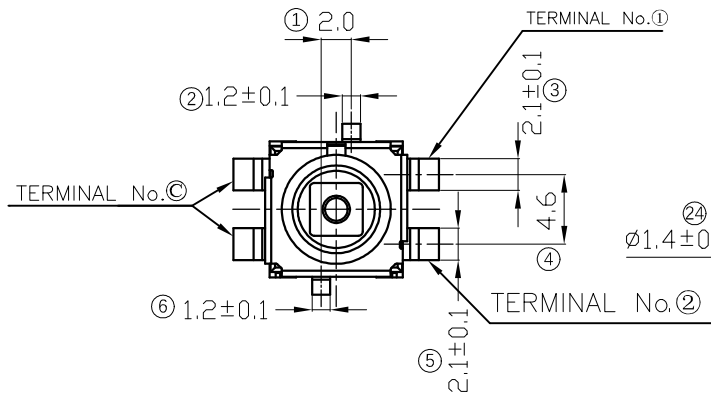

NOTES:

1. OPERATING FORCE: 300±70gf
2. CHANGEOVER TIMING OF CONTACTS: NONSHORTING

  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		Micro Switch	
UNLESS OTHERWISE STATED				WYJ		2024.09.20					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		PS9001	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
	±2°	SCALE	2:1					PRINT DATE		2025.02.19	
										