

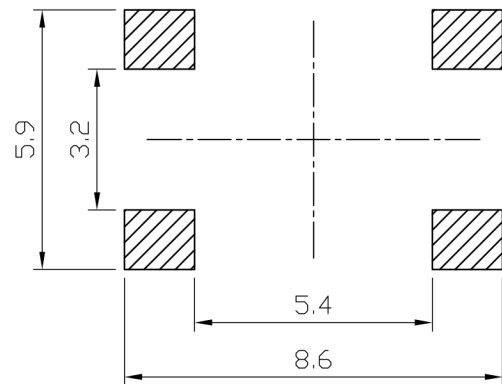
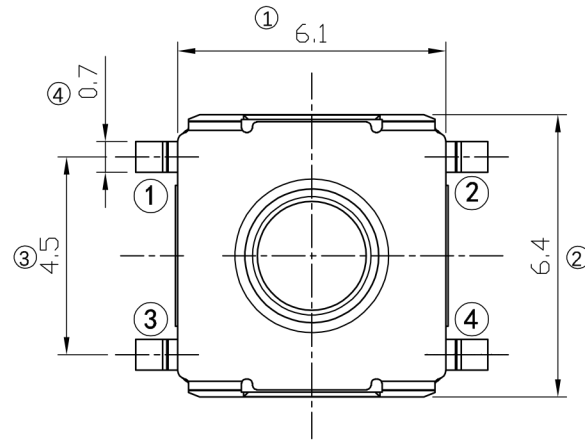




本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.



P.C.B LAYOUT

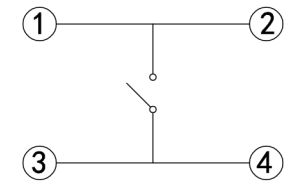

CIRCUIT

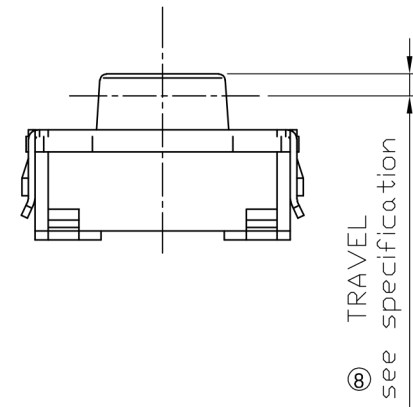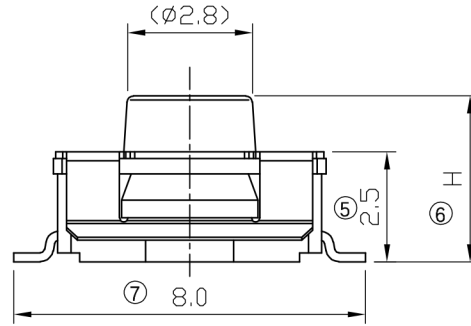


TRAVEL
see specification

SPECIFICATIONS:

Operating temperature range:-40℃to+85℃
Rating:50mA, 12V DC Max
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V AC for 1Min
Contact resistance:100mΩ Max
Life:100,000 Cycles
Travel:0.5±0.2mm
Operating force:200±50gf



RoHS COMPLIANT  Pb-Free  Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED					2024.09.20			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCM46- Y 5 C W	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	6:1			PRINT DATE	2025.02.11	