

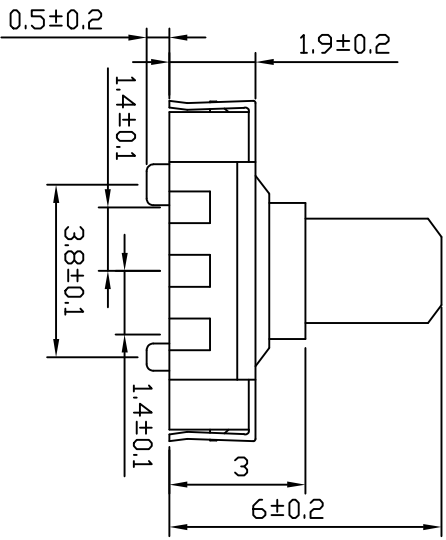
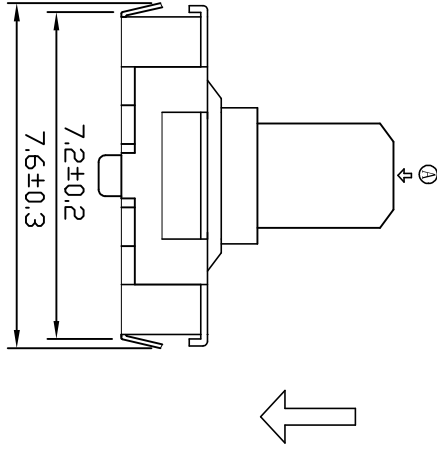
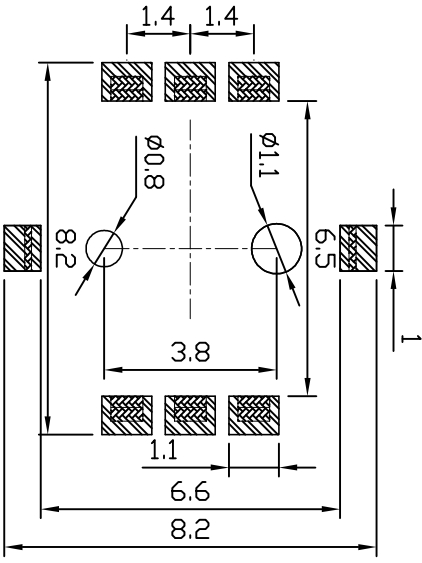


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

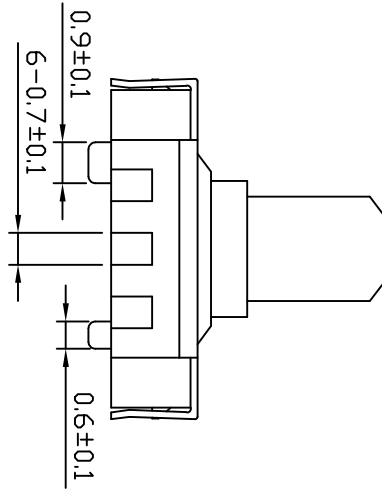

CIRCUIT DIAGRAM									
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
⑪	⑫	⑬	⑭	⑮	⑯	⑰	⑱	⑲	⑳

CIRCUIT

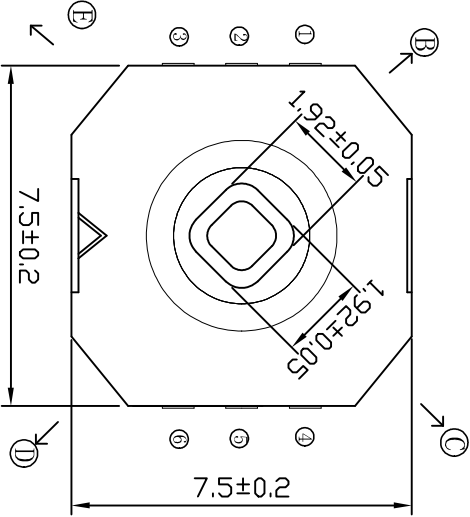

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -15°C to +60°C
Rating: 50mA 12V DC Max
Insulation resistance: 50MΩ min. 250V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 100mΩ Max
Life: 30,000 Cycles
Travel: centre: 0.15±0.08mm
Operating force: centre: 250±70gf
four directions: 200±60gf



Rohs COMPLIANT Pb-free				RoHS COMPLIANT Pb-free			
TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	CHKD	DATE	TITLE	Multi-Function Switch
X.XX	±0.15	REV	A	APPD	DATE	MODEL	TMHU13-060J-R
X.XXX	±0.10	UNIT	mm			SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.05.17