

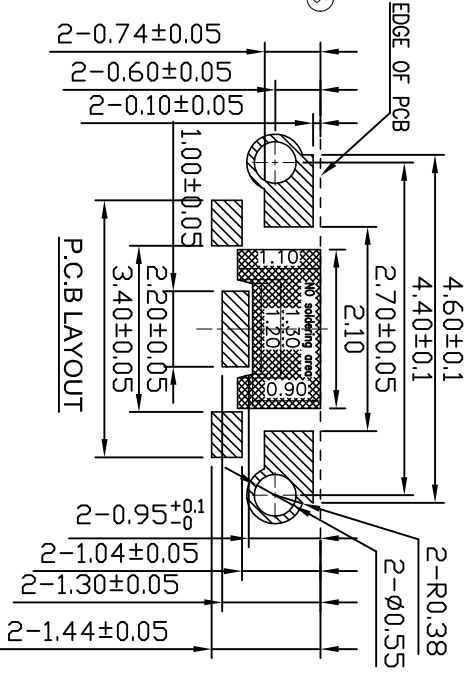
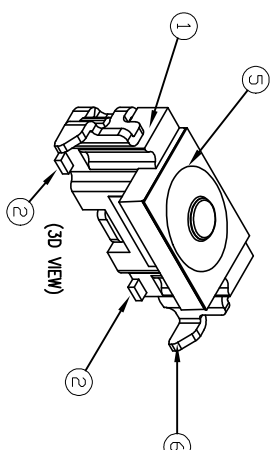
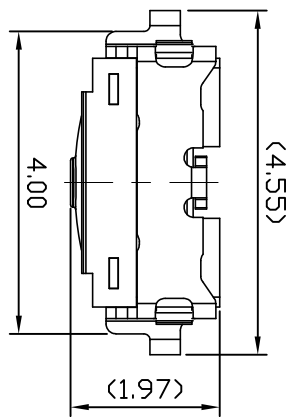
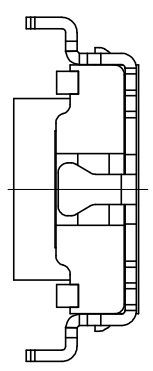
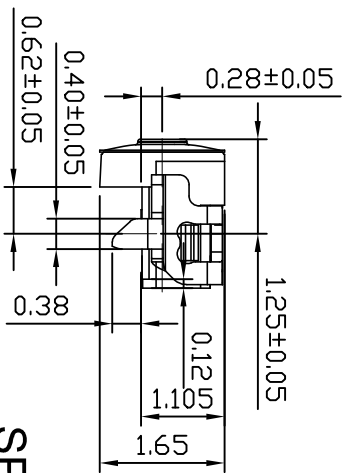


CIRCUIT

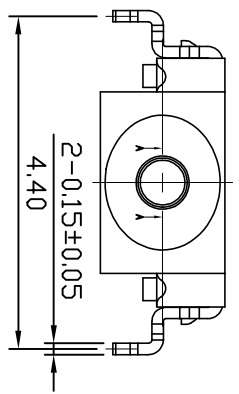

SECTION A-A

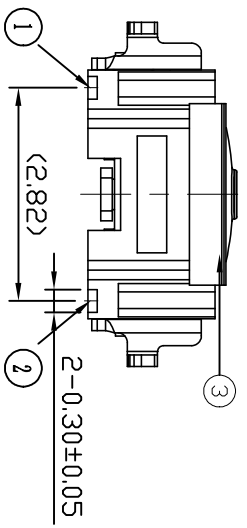

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 20mA, 15V DC Max
Insulation resistance: 50MΩ min, 100V DC
Dielectric strength: 250V AC, 1min
Contact resistance: 500mΩ Max
Life: 300,000 Cycles
Travel: 0.15 ± 0.05mm
Operating force: 160 ± 50gf

6	SHELL	1	PHOSPHOR BRONZE	Ag-Plate
5	FILM	1	PA	WHITE
4	KNOB	1	PA	BLACK
3	CONTACT	3	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	CASE	1	PPA	BLACK
ITEM	PART NAME	QTY	MATERIAL	FINISH



TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				DATE			
X.X	±0.20	SIZE	A4	DATE	2025.06.09	TITLE	Tact Switch
X.XX	±0.15	REV	A	CHKD		MODEL	THAJ01-J-R
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
±	±2°	SCALE	10:1	PRINT DATE	###		

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.