

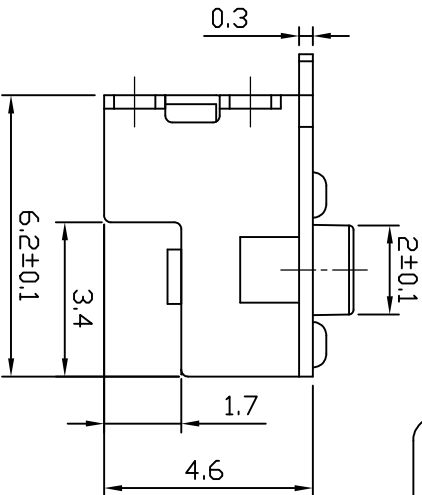
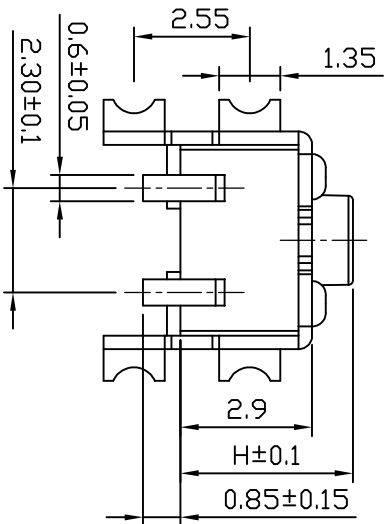



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

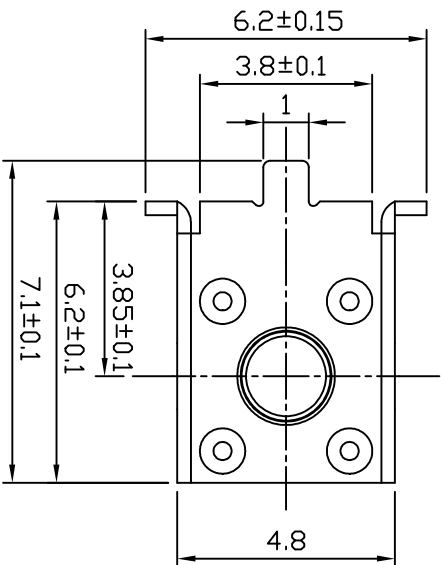

CIRCUIT

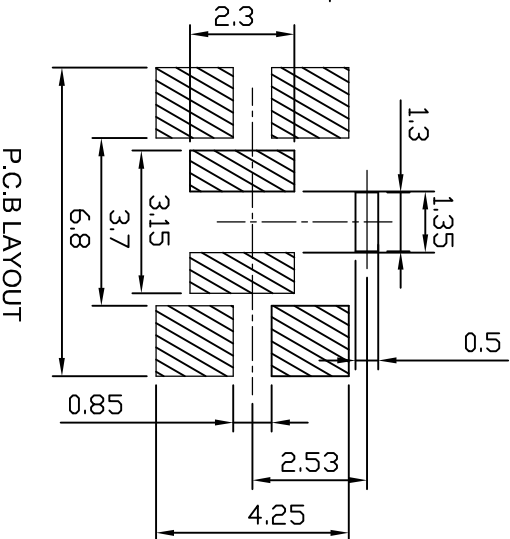

按压力 Operating force	行程 Travel	寿命 Life
160±30g	0.20±0.10	50,000次
260±50g	0.20±0.10	50,000次

SPECIFICATIONS:

Operating temperature range: -30°C to +70°C
Rating: Max 0.5A 12V DC
Insulation resistance: 100MΩ min. 250V DC
Dielectric strength: 100V.AC. 1Min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Operating force: 260±50gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



2024.08.21

单位 (mm)

H	3.8	4.0	4.5	4.8	5.0	5.5	6-12
---	-----	-----	-----	-----	-----	-----	------

DESIGN DATE 2024.08.21 TITLE Tact Switch

UNLESS OTHERWISE STATED WYJ CHKD MODEL THBM21G-038C-R

X.XX ±0.20 SIZE A4 DATE DATE SHEET 1/2

X.XXX ±0.10 REV A APPD DATE PRINT DATE 2025.04.29

