

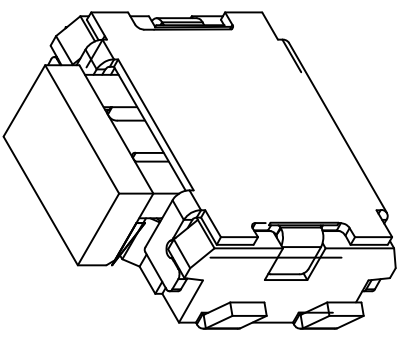
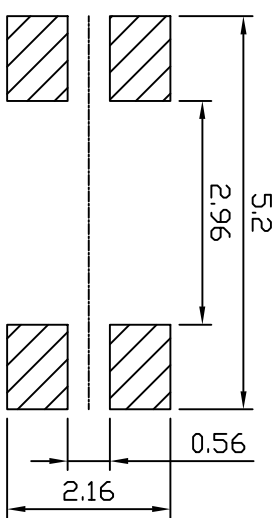
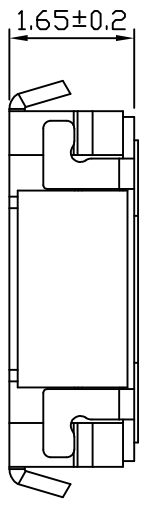



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

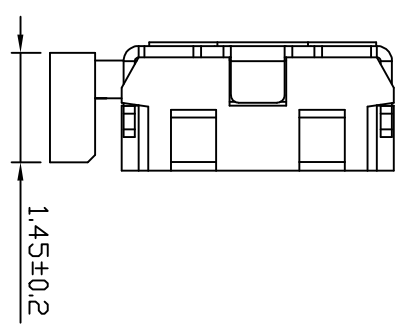

SPECIFICATIONS:

Operating temperature range: -20℃ to +70℃
Rating: 50mA DC 12 V Max
Insulation resistance: 100MΩ min. 250V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 50mΩ Max
Life: 100,000 Cycles
Travel: 0.20±0.10mm
Operating force: 180±40gf, 250±50gf

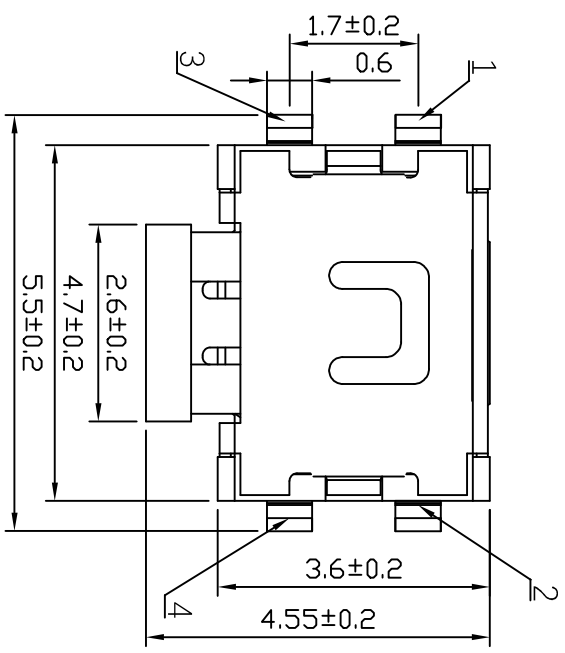

Rohs COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 06. 03		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	THBU20-N
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	10:1			PRINT DATE	2025.06.03