

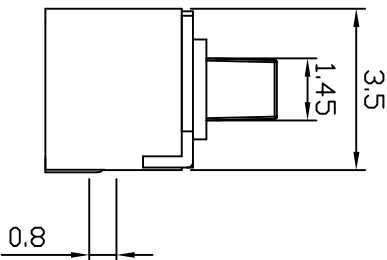




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

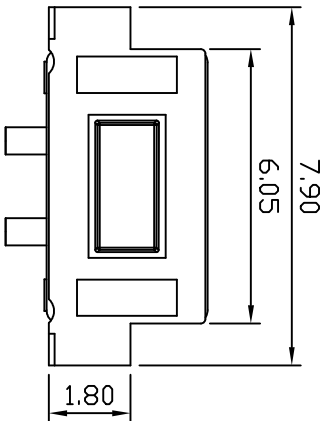

CIRCUIT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 300,000 Cycles
Travel: 0.25±0.10mm
Operating force: 160±50gf

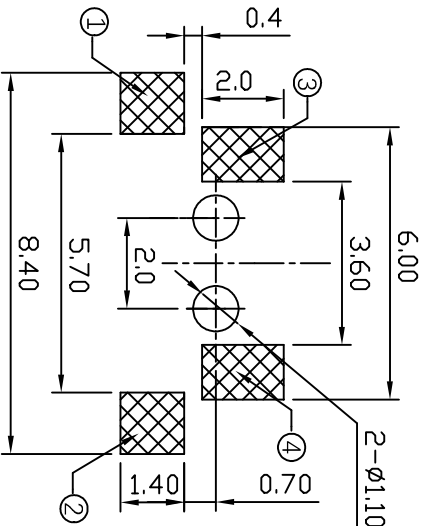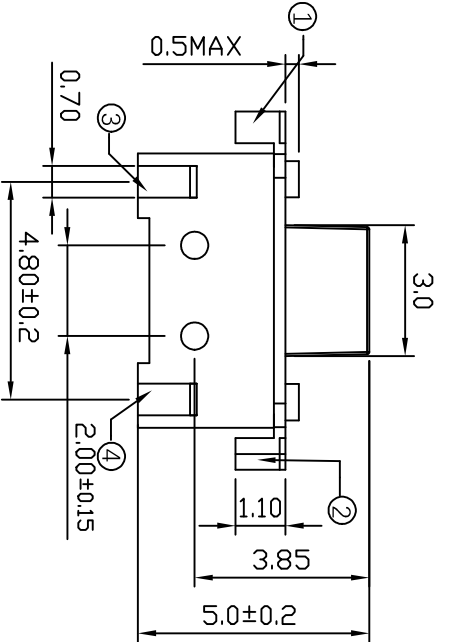

P.C.B LAND

序号	名称	数量	材料	备注
1	按钮	1	LCP	白色
2	端子	1	黄铜	镀银
3	上盖	1	冷压粉彩板	镀银
4	弹片	1	SUS	镀银
5	底座	1	PA	黑色



ROHS COMPLIANT Pb Pb-free HS RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2024. 10. 06		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	THCM04-050JW-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	±2°	SCALE	6:1			PRINT DATE	2025.06.05