


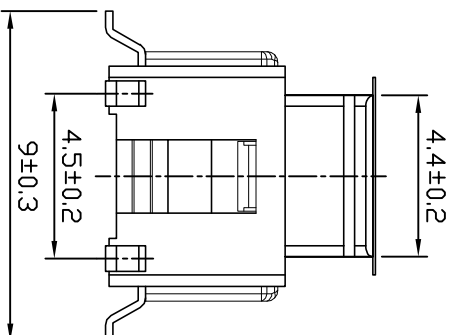
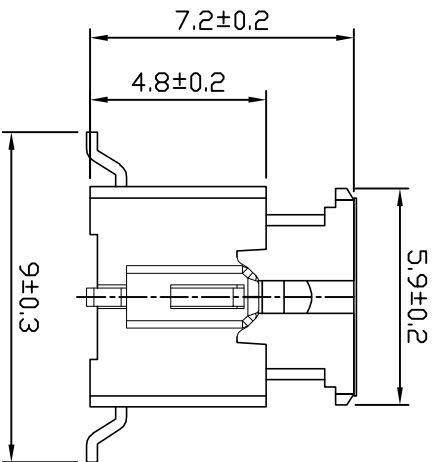



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

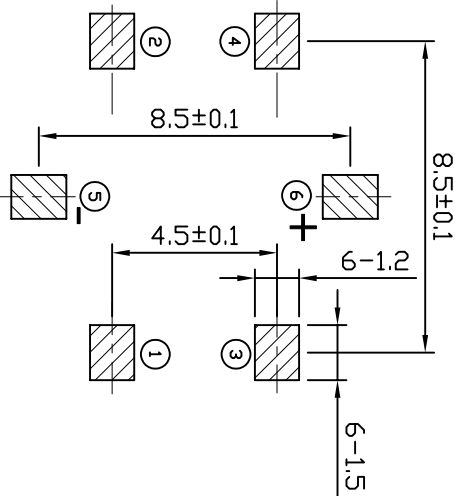

CIRCUIT

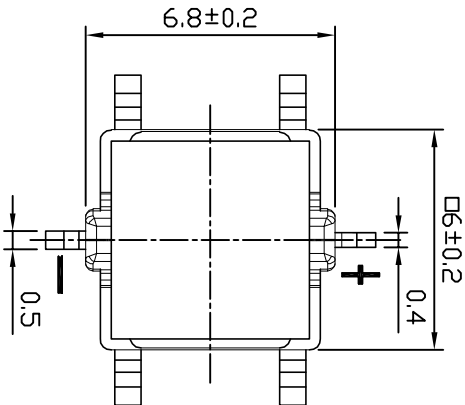

P.C.B LAYOUT

灯光	灯光代码
白光	W white
红光	R Red
绿光	G Green
黄光	Y yellow
蓝光	BL Blue
..	

SPECIFICATIONS:

Operating temperature range:-25℃to+75℃
Rating:30V DC, 30mA
Insulation resistance:100MΩ min, 100V DC
Dielectric strength:250V.AC, 1Min
Contact resistance:50mΩ Max
Life:100, 000 Cycles
Travel:0.25±0.1mm
Operating force:160±50gf



R&D COMPLIANT Pb-Free RoHS				Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN	DATE	TITLE	ILLUMINATED Switch
XX	±0.20	SIZE	A4	CHKD	2024. 06. 19	MODEL	LSM645-072J-R
XX	±0.15	REV	A	DATE		SHEET	1/3
XXX	±0.10	UNIT	mm	APPD		PRINT DATE	2025.02.11
±2°	SCALE	5:1					