
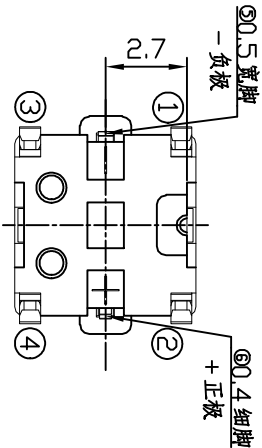


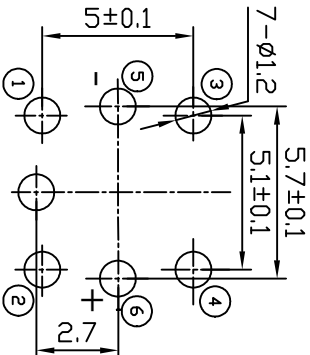
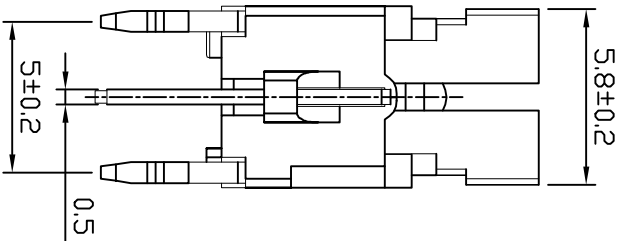


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

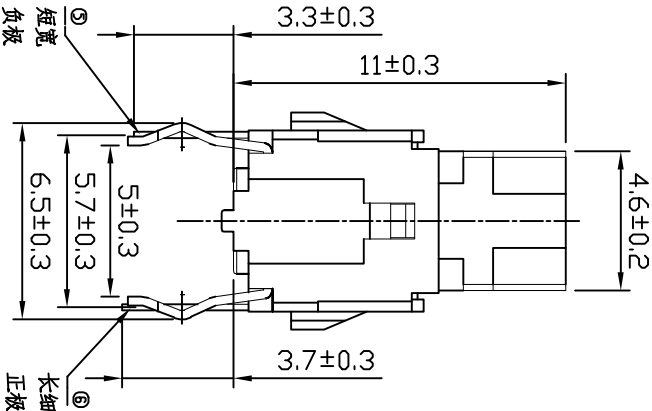

SPECIFICATIONS:

Operating temperature range: -25℃to+75℃
Rating: 30V DC, 30mA
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V, AC, 1min
Contact resistance: 50mΩ Max
Life: 100, 000 Cycles
Travel: 0. 25±0. 1mm
Operating force: 160±50gf

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.



2024.06.21

ISSUED

R&D DEPT.

灯光	灯光代码
白光	W white
红光	R Red
绿光	G Green
黄光	Y Yellow
蓝光	BL Blue
..	

TOLERANCE				DESIGN	DATE	TITLE	Illuminated Switch		
UNLESS OTHERWISE STATED				WYJ	2024. 06. 21				
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LSP635-110J-B		
X.XX	±0.15	REV	A						
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3		
△	±2°	SCALE	4:1			PRINT DATE	2025.04.16		