


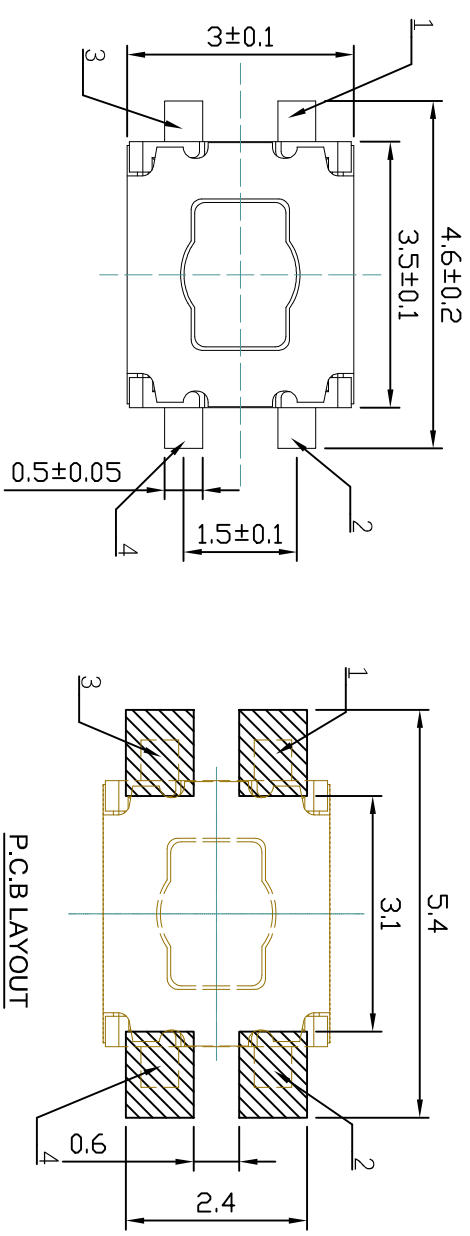


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao



SPECIFICATIONS:

Operating temperature range: -40°C to $+85^{\circ}\text{C}$
Rating: 50mA, 12V DC Max
Insulation resistance: 100M Ω min, 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100m Ω Max
Life: 100, 000 Cycles
Travel: $0.18 \pm 0.10\text{mm}$
Operating force: $400 \pm 50\text{gf}$

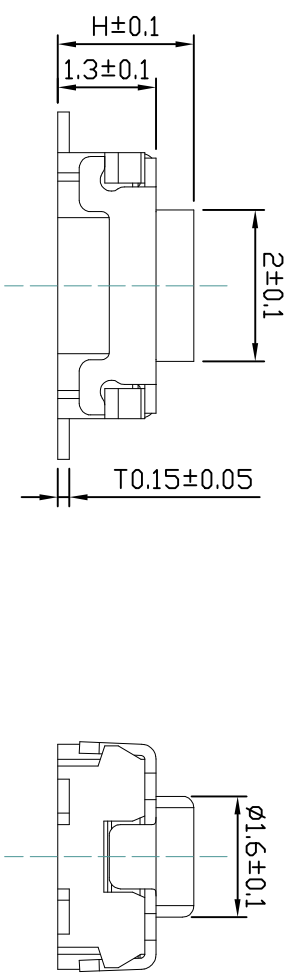

RoHS COMPLIANT Pb-free Halogen free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 03. 17		
X.X	± 0.20	SIZE	A4	CHKD	DATE	MODEL	TVBF22-N0180-R
X.XX	± 0.15	REV	A				
X.XXX	± 0.10	UNIT	mm	APPD	DATE	SHEET	1/3
	$\pm 2^{\circ}$	SCALE	10:1			PRINT DATE	2025.03.17