

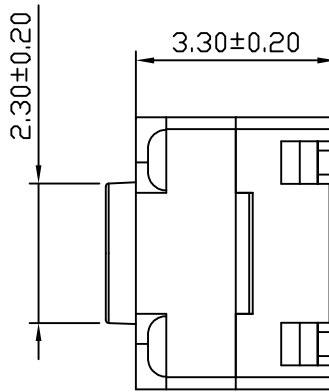
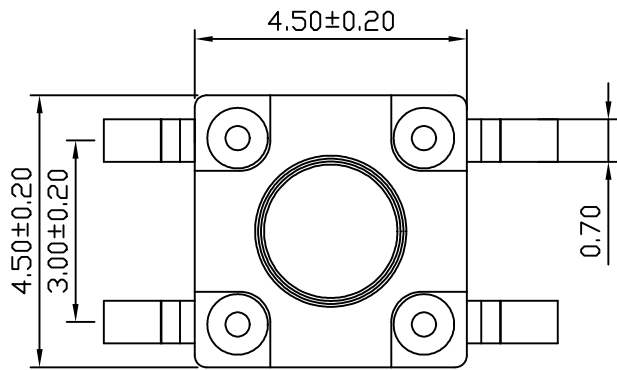
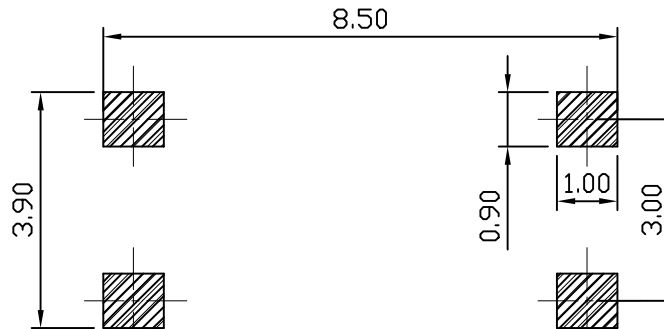



本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

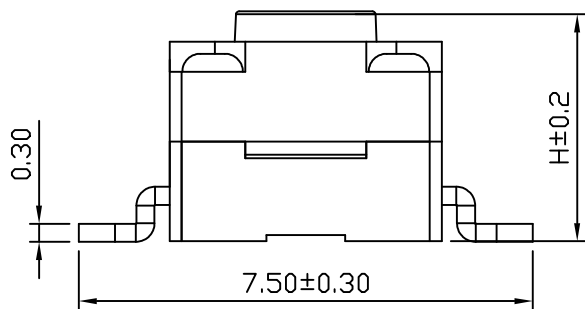

H
3.8
4.3
4.5
5.0
5.5
6.0
7.0



P.C.B LAYOUT

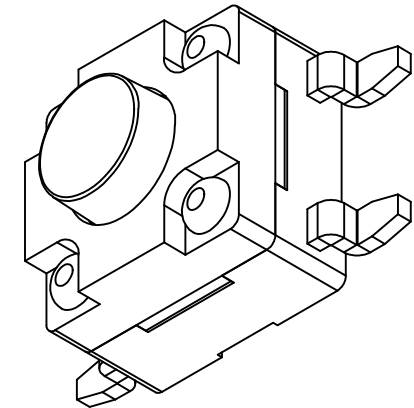

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA 12V DC Max
Insulation resistance:100MΩ min. 250V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:50mΩ Max
Life:100,000 Cycles
Travel:0.20±0.10mm
Operating force:250/180±40gf
防水等级: IP66



RoHS COMPLIANT Pb-Free Halogen Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co.,Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 03. 12		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCM70-038CB-R
X.XX	±0.15	REV	A	APPD		SHEET	1/3
X.XXX	±0.10	UNIT	mm				
△	±2°	SCALE	8:1	PRINT DATE		2025.04.23	☉