

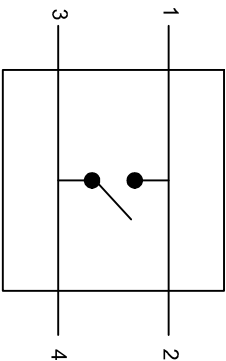
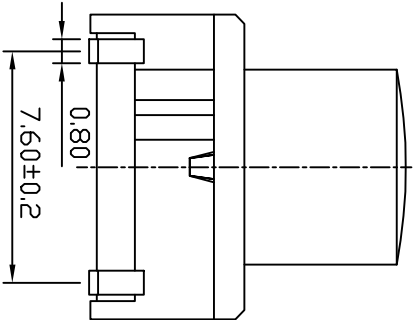
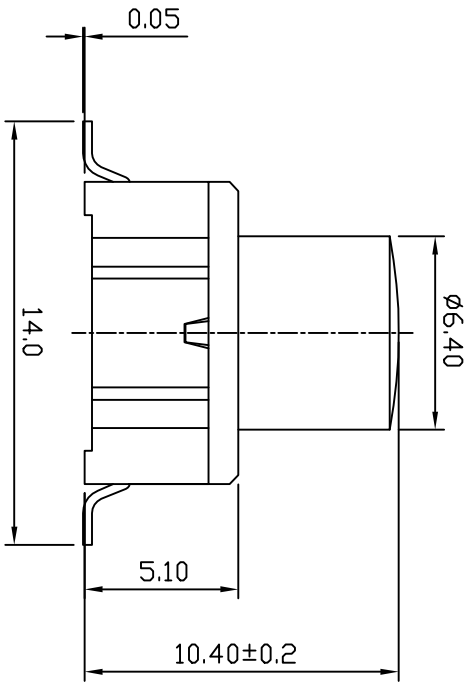


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

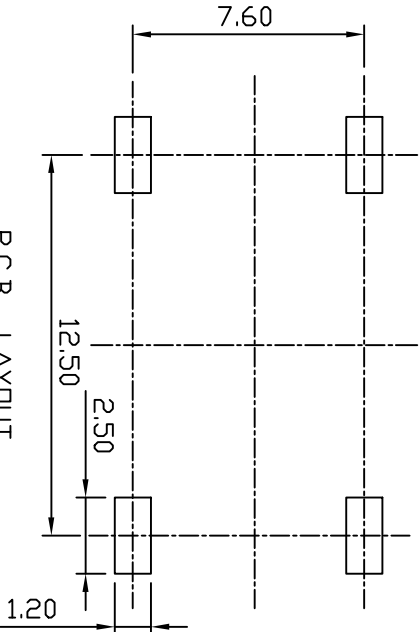

CIRCUIT

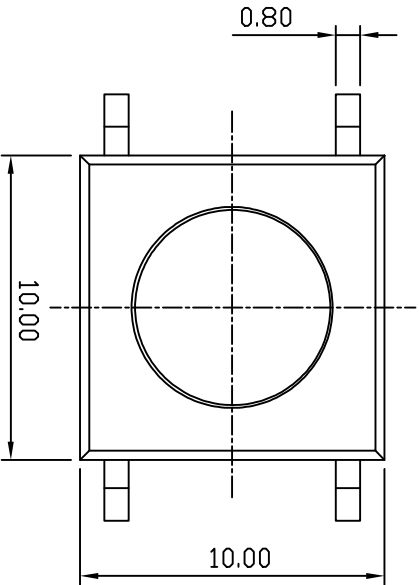

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +160°C
Rating: 50mA, 24V DC Max
Insulation resistance: 10MΩ min, 100V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 50mΩ Max
Life: 1,000,000 Cycles
Travel: 1.0 ± 0.2mm
Operating force: 300+80/-40gf

序号	名称	数量	材料
6	端子	1	铜合金
5	簧片	1	不锈钢
4	橡胶按钮	1	硅胶
3	上盖	1	尼龙
2	按钮	1	尼龙
1	底座	1	尼龙



Rohs COMPLIANT Pb-Free RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2024.10.06	TITLE Tact Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL TVC/M73-104X-R	
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET 1/3	PRINT DATE 2025.06.07
4:1							