


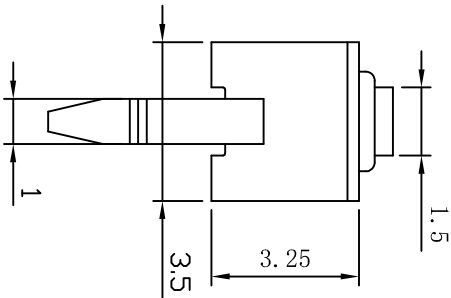
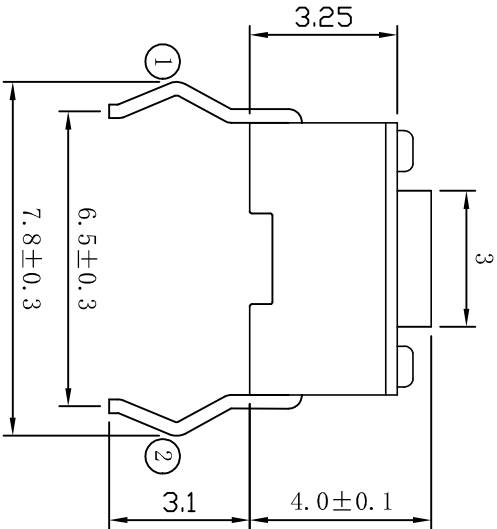


本公司智慧财产未经许可不得复制

ming biao copyright may not be used without permission from ming biao.

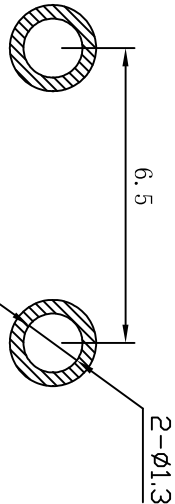

CIRCUIT

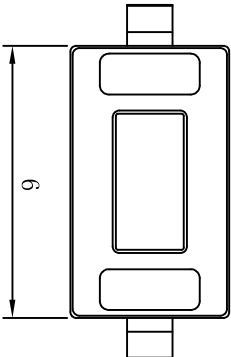

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -40°C to +85°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min., 100V DC
Dielectric strength: 250V AC for 1Min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Travel: 0.25±0.10mm
Operating force: 260±40gf

材料:

本体:	PPA	(黑/白色)
按钮:	PPA	(黑/白色)
卡件:	黄铜	(镀银)
弹片:	不锈钢	(镀银)
盖板:	铁/黄铜	(镀铜锡)



Rohs COMPLIANT Pb-Free RoHS Compliant				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch
UNLESS OTHERWISE STATED				WYJ	2025. 06. 20		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TV/CP18-040CB-B
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	6:1			PRINT DATE	2025.06.20