
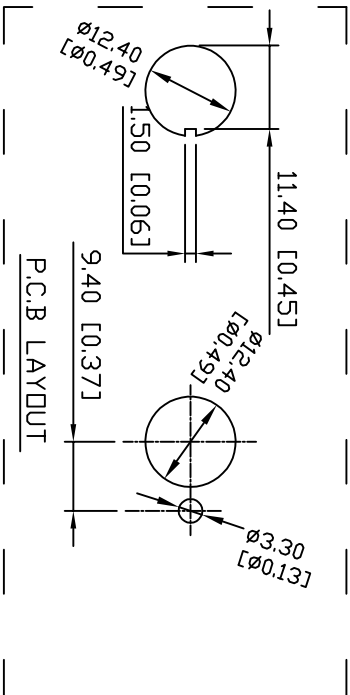

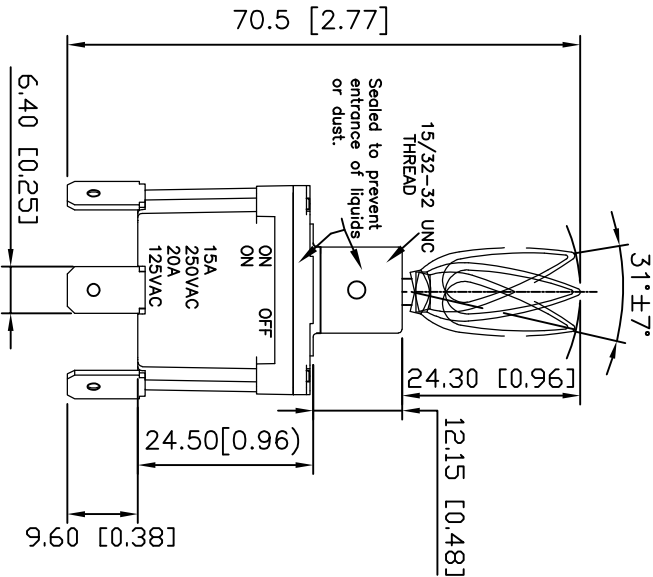


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

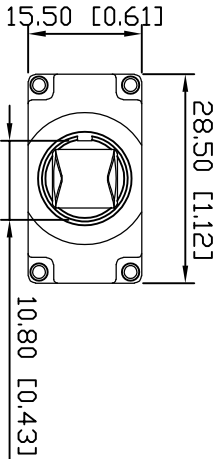

SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 20mΩ.(Max)
 - 2.INSULATION RESISTANCE: 100VDC-100MΩ.(Min)
 - 3.DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
 - 4.MECHANICAL LIFE CYCLE: 100,000 CYCLES.
 - 5.OPERATING TEMPERATURE: -40 TO +85°C.
 - 6.FRONT SEAL: IP 68.
- RATING:
- 1.RESISTIVE LOAD: 10A 125/250VAC, 15A 28VDC.
 - 2.INDUCTIVE LOAD: 15A 28VDC.
 - 3.LAMP LOAD: 5A 28VDC.

Model	Switching Position			Schematic
	1 c.d.k.	2 c.d.k.	3 c.d.k.	
SG1	ON	NONE	ON	
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NA	ON	
Term. Comm.	2-1	OPEN	2-3	

NO	PART NAME	MATERIAL	QTY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STEEL	1	Ni PLATED



ROHS COMPLIANT Pb-Free Pb RoHS RoHS Free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.				
TOLERANCE			DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED			WYJ		2024.09.15		Toggle Switches	
X.X	±0.20	SIZE	A4	CHKD	DATE		MODEL	
X.XX	±0.15	REV	A		DATE		HT-SG3B3T1T24	
X.XXX	±0.10	UNIT	mm	APPD	DATE		SHEET	
SCALE	1:1				DATE		PRINT DATE	
					2025.02.11		1/2	