

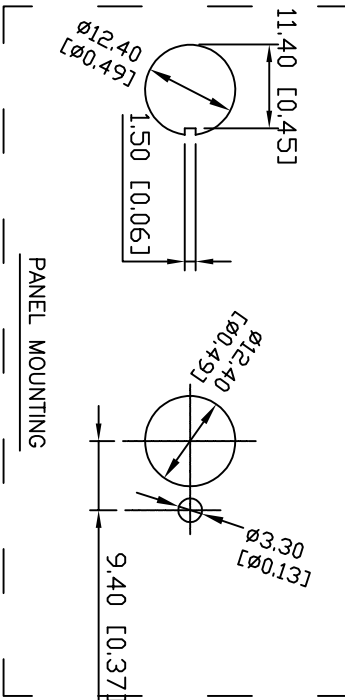
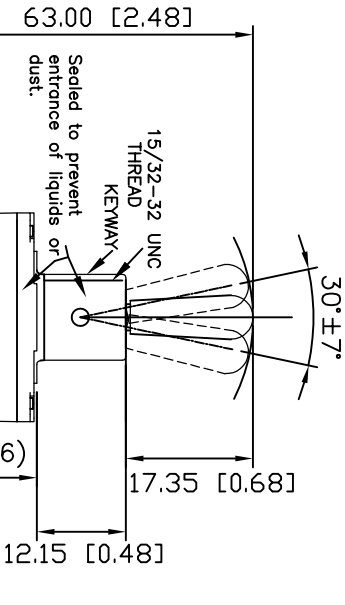


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



- SPECIFICATIONS:
- 1. CONTACT RESISTANCE: 20mΩ (Max)
 - 2. INSULATION RESISTANCE: 100VDC-100MΩ (Min)
 - 3. DIELECTRIC STRENGTH: 1500VAC-1MINUTE.
 - 4. MECHANICAL LIFE CYCLE: 100,000 CYCLES.
 - 5. OPERATING TEMPERATURE: -40 TO +85°C.
 - 6. FRONT SEAL: IP 68.
 - RATING
 - 1. RESISTIVE LOAD: 15A 125/250VAC, 15A 28VDC.
 - 2. INDUCTIVE LOAD: 15A 28VDC.

Model	Switching Position			Schematic
	1 cdk 3	1 cdk 3	1 cdk 3	
SG1	ON	NONE	ON	
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NA	ON	
Term. Comm.	2-1	OPEN	2-3	

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr PLATED
2	HOUSING	NYLON (UL94V-0)	1	
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	O-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STEEL	1	Ni PLATED



R&HS COMPLIANT Pb Pb-Free HF Halogen Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.					
TOLERANCE			DESIGN		DATE		TITLE		
UNLESS OTHERWISE STATED			9999		2024.09.18		Toggle Switches		
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	±0.15	REV	A					HT-SG3B7T1T23	
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET	
✓	±2°	SCALE	1:1					1/2	
						PRINT DATE		2025.02.11	
									

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.