
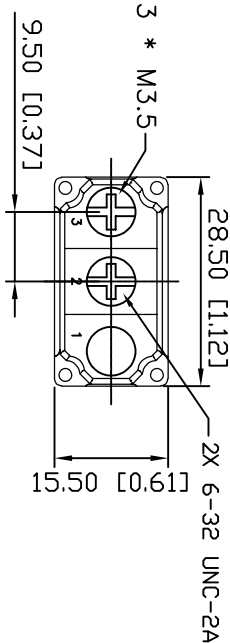
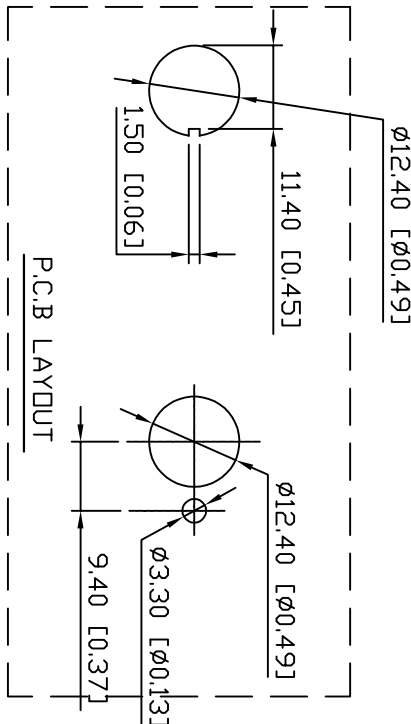
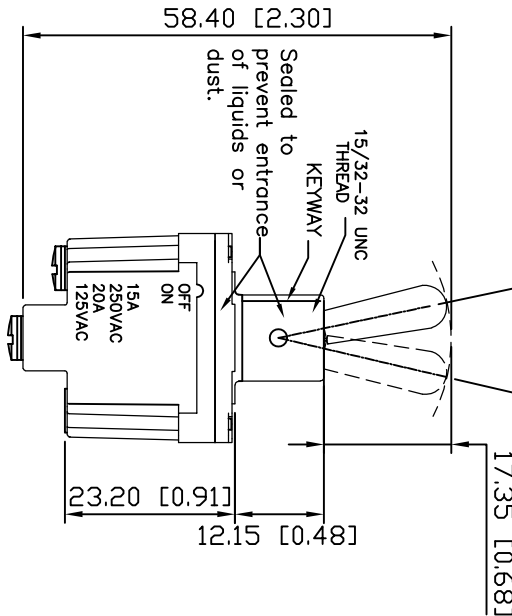


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



SPECIFICATIONS:

1.CONTACT RESISTANCE: 20mΩ (Max)

2.INSULATION RESISTANCE:

100VDC-100MΩ.(Min)

3.DIELECTRIC STRENGTH: 1500VAC-1MINUTE.

4.MECHANICAL LIFE CYCLE: 100,000 CYCLES.

5.OPERATING TEMPERATURE: -40 TO +85°C.

6.FRONT SEAL: IP 68.

RATING:

1.RESISTIVE LOAD: 15A 125/250VAC, 15A 28VDC. 2.INDUCTIVE LOAD: 15A 28VDC.

Model	Switching Position			Schematic
	1 c.o.l. 3	1 c.o.l. 3	1 c.o.l. 3	
SG1	ON	NONE	ON	
SG2	OFF	NONE	(ON)	
SG3	ON	OFF	ON	
SG4	(ON)	OFF	(ON)	
SG5	(ON)	OFF	ON	
SG9	OFF	NA	ON	
Term. Conn.	2-1	OPEN	2-3	

ND	PART NAME	MATERIAL	Q'TY	FINISHING
1	ACTUATOR	COPPER ALLOY	1	Cr
2	HOUSING	NYLON (UL94V-0)	1	PLATED
3	BUSHING	ZINC ALLOY	1	
4	TERMINAL	COPPER ALLOY	3	Ag PLATED
5	CONTACT	COPPER ALLOY	1	Ag PLATED
6	D-RING	SILICONE RUBBER	1	
7	SHEEL	STAINLESS STEEL	1	Ni PLATED



RÖHS COMPLIANT Pb-free		RoHS	
TOLERANCE		DESIGN	
UNLESS OTHERWISE STATED		DATE	
XX ±0.20		2024.09.18	
XX ±0.15		DATE	
X.XXX ±0.10		MODEL	
SCALE		HT-SG9B7T1T11	
1:1		DATE	
DATE		SHEET	
DATE		1/2	
DATE		PRINT DATE	
DATE		2025.02.11	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

Toggle Switches