
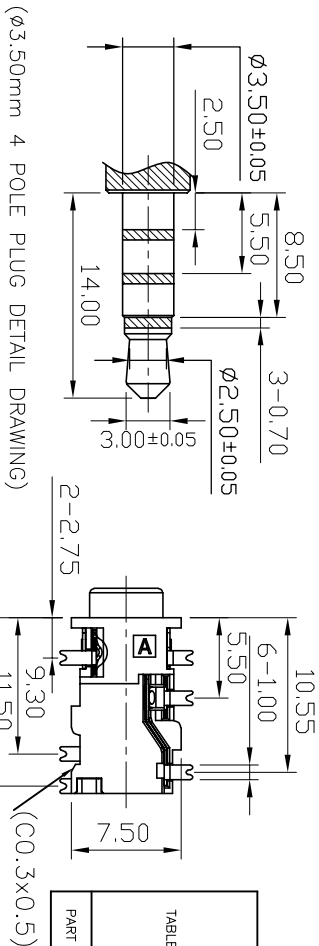


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.


TABLE A:		ALL SOLDER TAILS	ALL SOLDER TAILS
PART NO			
ST-228-SOP--061-142			
ST-228-S00-061-141/142-182			
ST-228-SOP--061-14A			
ST-228-S00-061-14A			

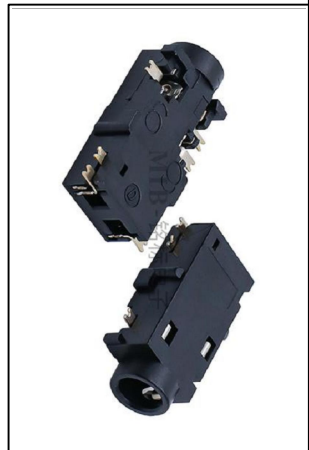

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



COPLANARITY DESCRIPTION

TABLE B:





ST-0228S00--061-142/14A/182
ST-0228SOP--061-142/14A

CIRCUIT

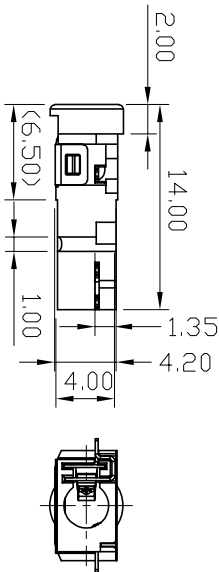

REVERSED PACKING P.C.B LAYOUT

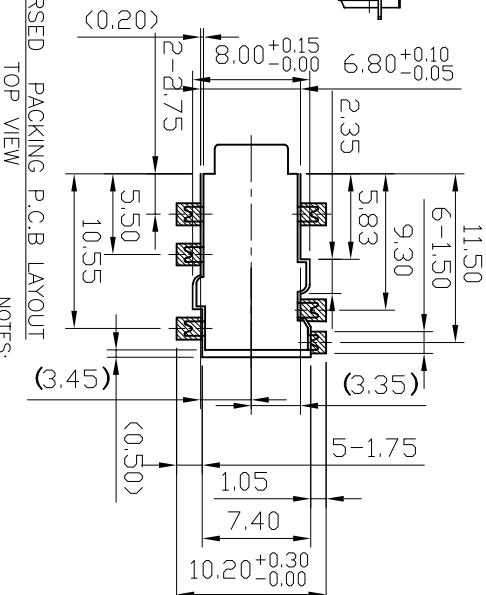

3D VIEW

NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 3.0~30.0N (0.30~3.0kgf).;
7. CONNECTOR UNMATING FORCES: 3.0~30.0N(0.3~3.0kgf).;

RIGHT PACKING P.C.B LAYOUT
TOP VIEW

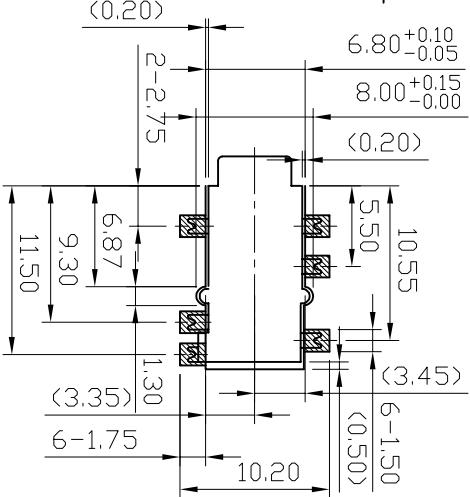


TABLE C:

ITEM	PART NUMBER	DESCRIPTION	PACKING
01	ST-0228SOP--061-14A	REVERSED PACKING;NO LOGO;WITH SPIGOT.	REEL
02	ST-0228S00--061-182	RIGHT PACKING;WITH LOGO;WITH SPIGOT.	REEL
03	ST-0228S00--061-142	RIGHT PACKING;WITH LOGO;WITH SPIGOT.	REEL
04	ST-0228SOP--061-142	RIGHT PACKING;NO LOGO;WITH SPIGOT.	REEL
05	ST-0228S00--061-14A	REVERSED PACKING;WITH LOGO;WITH SPIGOT.	REEL



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE				DESIGN	DATE	TITLE	PHONE JACK
UNLESS OTHERWISE STATED				WYJ	2024.09.24		
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	ST-228-S
XXX	±0.15	REV	A				
XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
✓	±2°	SCALE	2:1			PRINT DATE	2025.02.13