

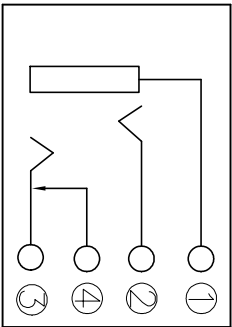
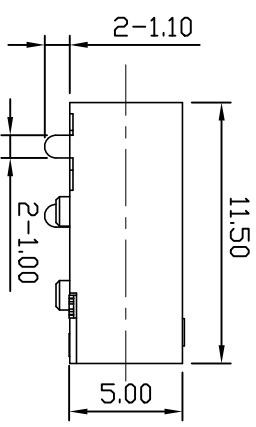


(ø3.50 3 POLE PLUG DETAIL DRAWING)

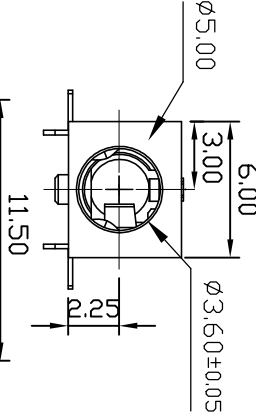

CIRCUIT





3D VIEW

技术要求:

1. 电气及机械特性要求如下:

- 1.1 接触阻抗: 50mΩ 以下;
 - 1.2 绝缘阻抗: 100MΩ 以上;
 - 1.3 耐电压: 500V AC以上;
 - 1.4 耐插拔: 5,000次以上;
 - 1.5 插入力: 0.7~3.0kgf (7~30N) ;
 - 1.6 拔出力: 0.7~3.0kgf (7~30N) .
2. 除特殊说明外, 无标示的尺寸均为参考尺寸;
3. 产品符合RoHS&HF环保标准要求.

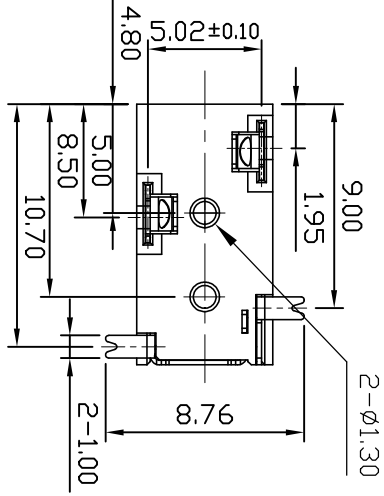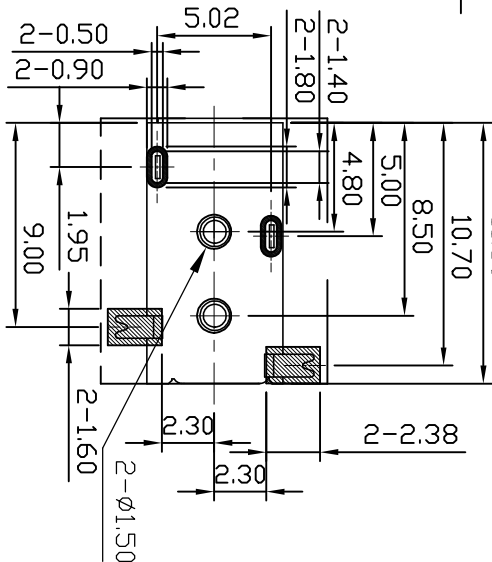

RECOMMENDED PCB LAYOUT
TOP VIEW TOL:±0.05



TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				wylj		2024.09.24		PHONE JACK	
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL	
X.XX	±0.15	REV	A	APPD		DATE		ST-236-T2Q-041B-B	
X.XXX	±0.10	UNIT	mm			SHEET		1/3	
SCALE			3:1			PRINT DATE		2025.07.07	

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.