




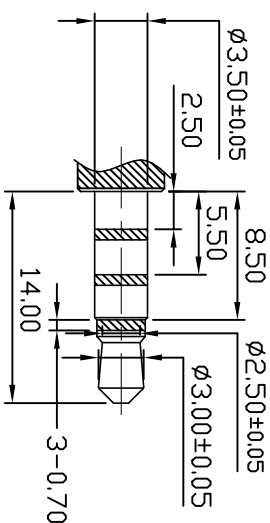



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

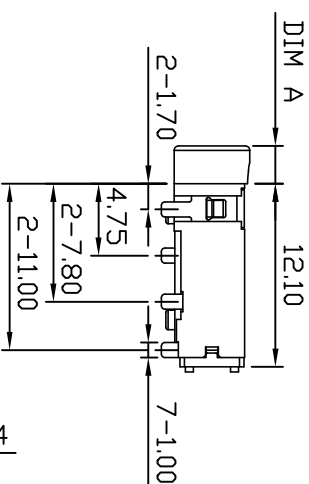

($\phi 3.50\text{mm}$ 4 POLE PLUG DETAIL DRAWING)

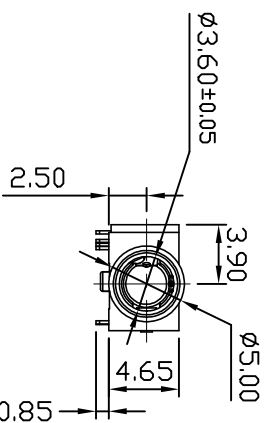

3D VIEW

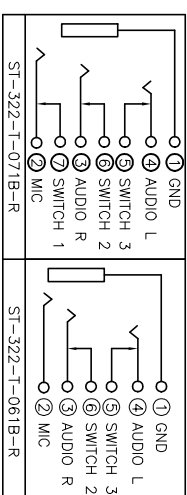


TABLE A:

SCHEMATIC

ITEM	PART NUMBER	DIM A
01	ST-322-T-071B-R	2.50
02	ST-322-T-071B-R	1.50
03	ST-322-T-061B-R	2.50

技术要求:

1. 电气及机械特性要求如下:

1.1 接触阻抗: $50\text{m}\Omega$ 以下;

1.2 绝缘阻抗: $100\text{M}\Omega$ 以上;



1.3 耐电压: 500V AC 以上;

1.4 耐插拔: $5,000$ 次以上;

1.5 插入力: $0.3\sim 3.0\text{kgf}$ ($3\sim 30\text{N}$);

1.6 拔出力: $0.3\sim 3.0\text{kgf}$ ($3\sim 30\text{N}$);

2. 产品符合 RoHS 环保标准要求.

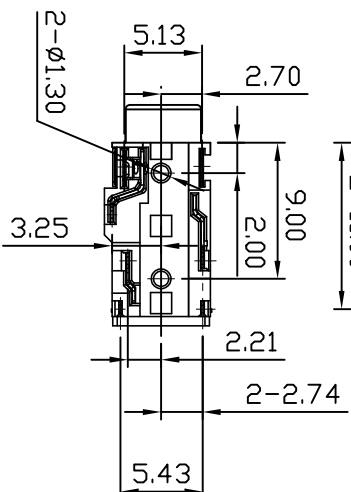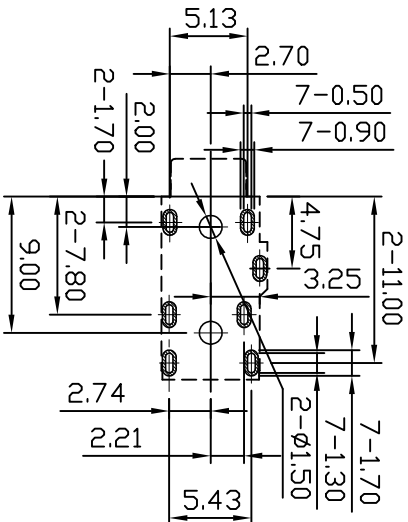

RECOMMENDED PCB LAYOUT
TOP VIEW TOL: ± 0.05



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

TOLERANCE

UNLESS OTHERWISE STATED

X.X ± 0.20 SIZE A4

X.XX ± 0.15 REV A

X.XXX ± 0.10 UNIT mm

$\angle$ $\pm 2^\circ$ SCALE 2:1

DESIGN

CHKD

DATE

DATE

DATE

DATE

PHONE JACK

TITLE

MODEL

ST-322-T

SHEET

PRINT DATE

G

F

E

D

C

B

A

H

H

H

H

H