

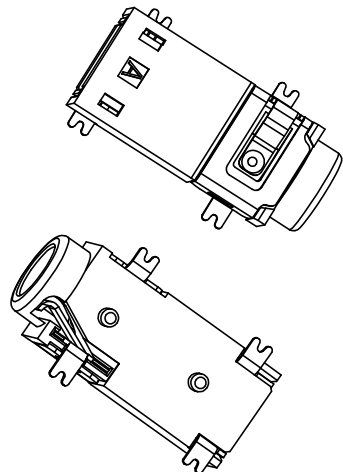
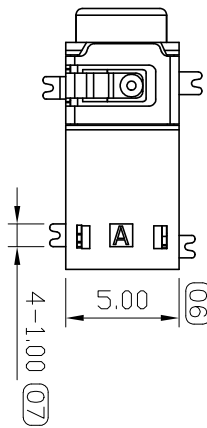





本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao

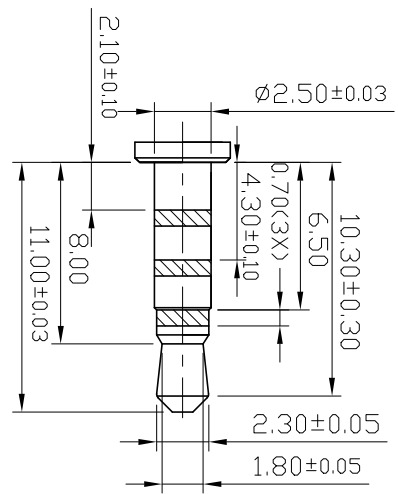

3D VIEW



CIRCUIT

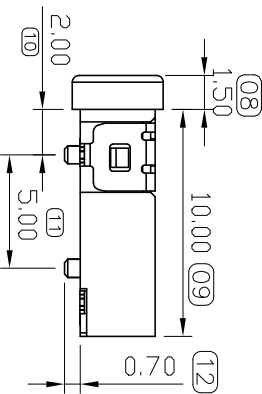
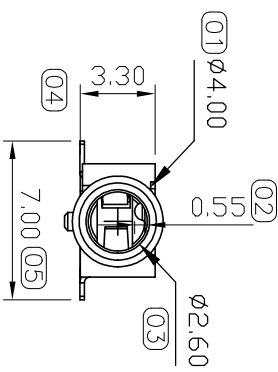


0.10 (13)

ALL SOLDER TAILS

NOTES:

- 1. CONTACT CURRENT RATING: 1A.
- 2. CONTACT RESISTANCE: 50 m² MAX.;
- 3. INSULATION RESISTANCE: 100M² MIN.;
- 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 5. DURABILITY: 5,000 CYCLES MIN.;
- 6. CONNECTOR MATING FORCES: 3.0~30.ON.;
- 7. CONNECTOR UNMATING FORCES: 3.0~30.ON.;

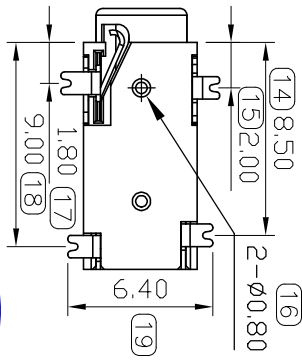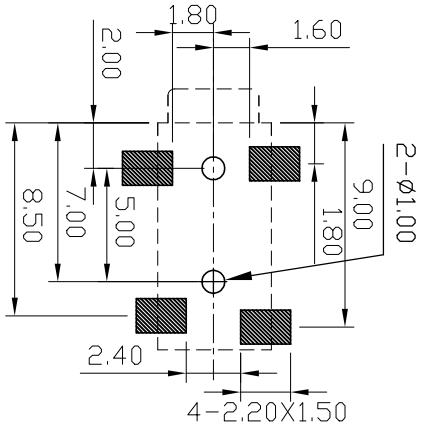

RECOMMENDED PCB LAYOUT



RoHS COMPLIANT Pb-free HF hazardous free				 东莞市铭标电子科技有限公司 Wing Biao Electronic Technology Co., Ltd.							
TOLERANCE				DESIGN		DATE		TITLE		PHONE JACK	
UNLESS OTHERWISE STATED				WYJ		2024. 09. 24					
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		ST-348-S00-041B-R	
X.XX	±0.15	REV	A								
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
A	±2°	SCALE	3:1					PRINT DATE		2025.07.07	
											



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.