

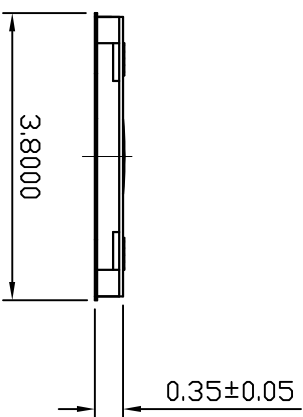

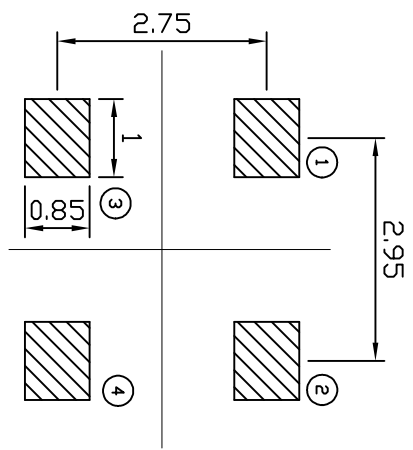


本公司智慧财产未经许可不得复制
ming biao copy/right may not be used without permission from ming biao.

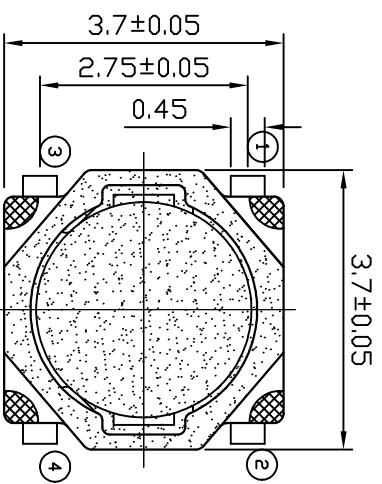

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50 mA 12V DC Max
Insulation resistance: 100M Ω min, 100V DC
Dielectric strength: 250V.AC. 1Min
Contact resistance: 100m Ω Max
Life: 80,000 Cycles
Travel: 0.15 $\pm$ 0.10mm
Operating force: 180 $\pm$ 50gf

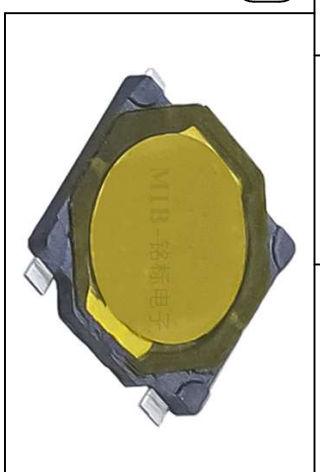

Rohs COMPLIANT Pb-free Halogen Free			东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.		
TOLERANCE			DESIGN	DATE	TITLE
UNLESS OTHERWISE STATED			WYJ	2024.03.09	Tact Switch
XX	$\pm$ 0.20	SIZE	A4	DATE	MODEL
XX	$\pm$ 0.15	REV	A	DATE	TAF05-NYN-R
XXX	$\pm$ 0.10	UNIT	mm	DATE	SHEET
△	$\pm$ 2°	SCALE	10:1	PRINT DATE	1/3