

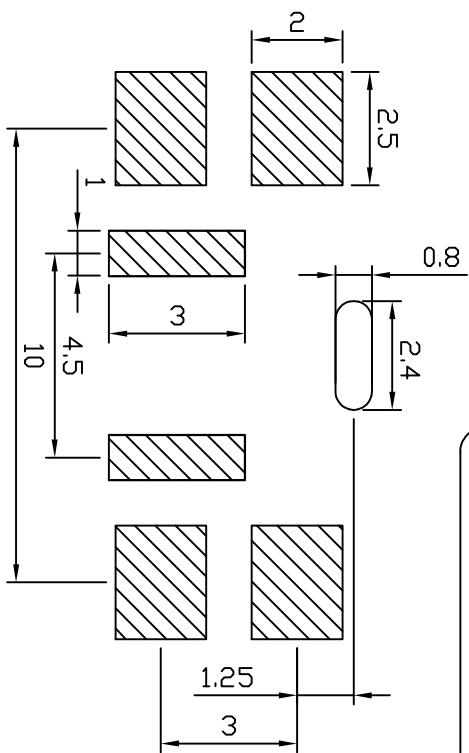




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

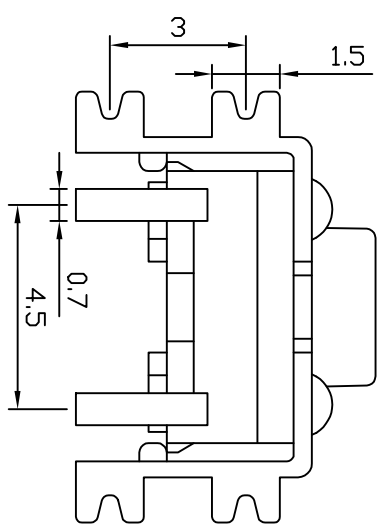

H	对应高度
0.9	4.3h
1.6	5h
2.1	5.5h
2.6	6h
3.1	6.5h
3.6	7h
4.1	7.5h
4.6	8h
5.1	8.5h
5.6	9h
6.1	9.5h
6.6	10h

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 100V DC
Dielectric strength: 250V AC for 1min
Contact resistance: 100mΩ Max
Life: 100,000 Cycles
Travel: 0.25±0.1mm
Operating force: 250±40gf

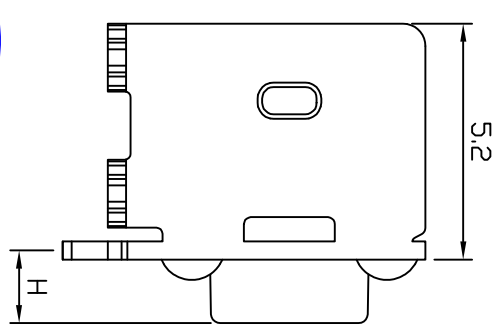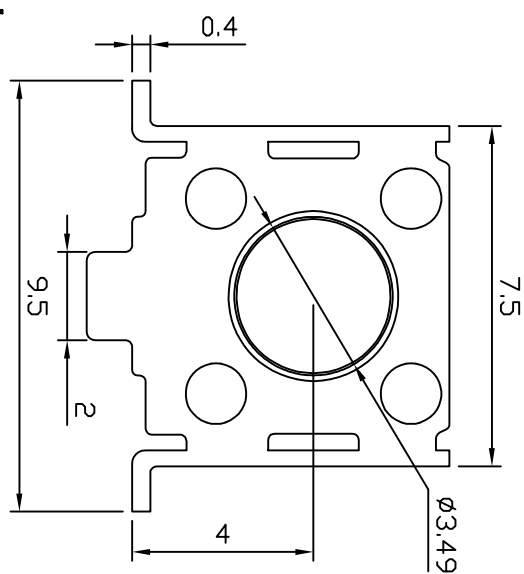

材料:

- 本体: PPA (黑色)
- 按钮: PPA (黑色)
- 卡件: 黄铜 (镀银)
- 弹片: 不锈钢 (镀银)
- 盖板: 铁 (镀锡)



RÖHS COMPLIANT Pb-free RoHS free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN DATE	TITLE	Tact Switch	
X.X	±0.20	SIZE	A4	DATE	2025.01.07		
X.XX	±0.15	REV	A	CHKD			
X.XXX	±0.10	UNIT	mm	MODEL	THCM40-050CB-R		
△	±2°	SCALE	6:1	APPD	DATE	SHEET	1/3
				PRINT DATE	2025.04.21		