

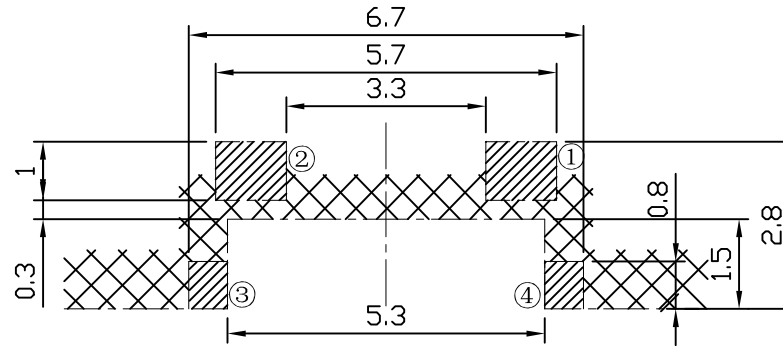
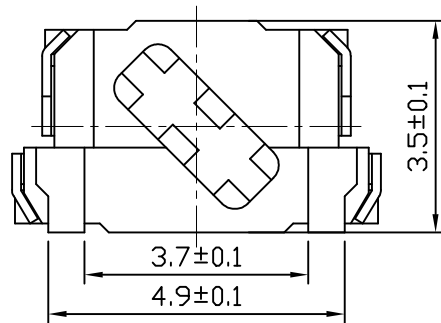

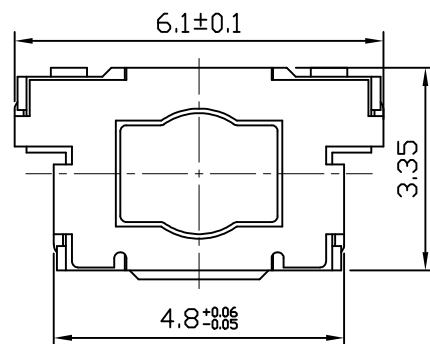


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

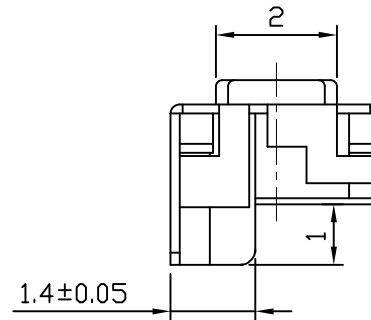


P.C.B LAYOUT

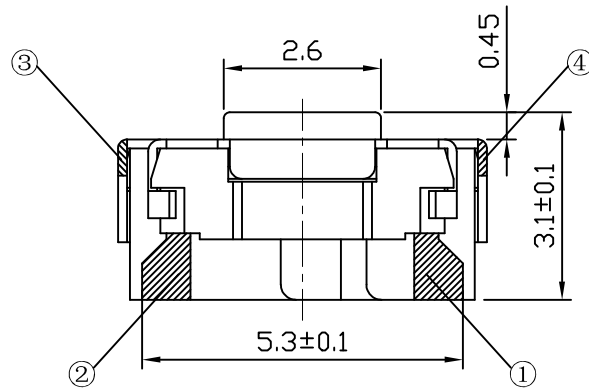

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50 mA 12V DC Max
Insulation resistance: 100M Ω min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 200m Ω Max
Life: 100,000 Cycles
Travel: 0.15 $\pm$ 0.05mm
Operating force: 160 $\pm$ 50gf



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.								
TOLERANCE				DESIGN		DATE		TITLE		Tact Switch		
UNLESS OTHERWISE STATED				WYJ		2024.03.12						
X.X		±0.20	SIZE	A4	CHKD		DATE		MODEL		THCM01-J-R	
X.XX		±0.15	REV	A								
X.XXX		±0.10	UNIT	mm	APPD		DATE		SHEET		1/3	
		±2°	SCALE	8:1					PRINT DATE		2025.05.15	