
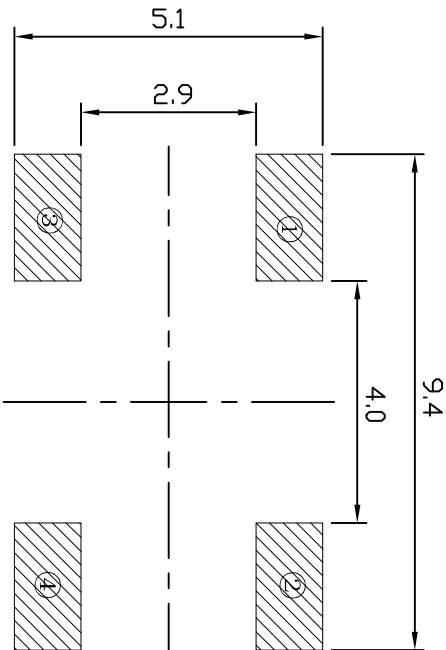
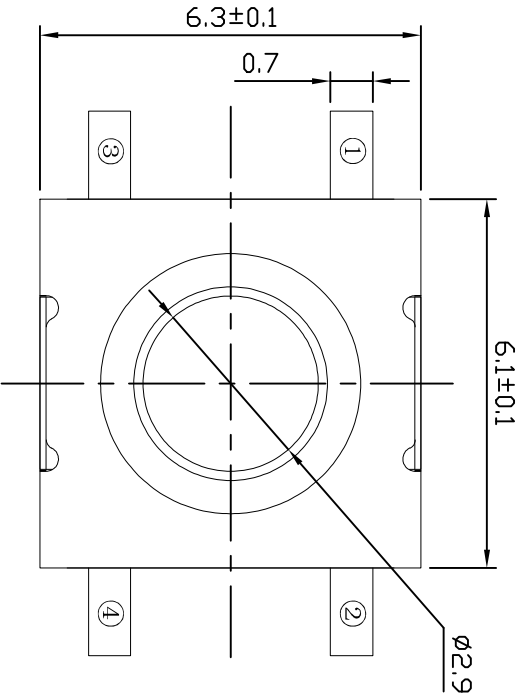



本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

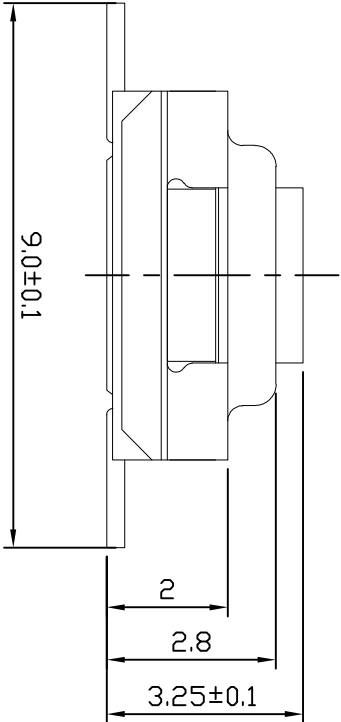

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-20°Cto+70°C
Rating:50mA DC12V
Insulation resistance:100MΩ min.100V DC
Dielectric strength:250V AC for 1min
Contact resistance:50mΩ Max
Life:100,000 Cycles
Travel:0.25+0.15/-0.1mm
Operating force:250±50gf



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

2025.01.04

ISSUED

R&D DEPT.

TOLERANCE				DESIGN		DATE		TITLE	
UNLESS OTHERWISE STATED				CHKD		DATE		Tact Switch	
X.X	±0.20	SIZE	A4			2025.01.04			
X.XX	±0.15	REV	A					TVCF55	
X.XXX	±0.10	UNIT	mm	APPD		DATE			
±	±2°	SCALE	8:1			SHEET		1/3	
						PRINT DATE		2025.05.16	