
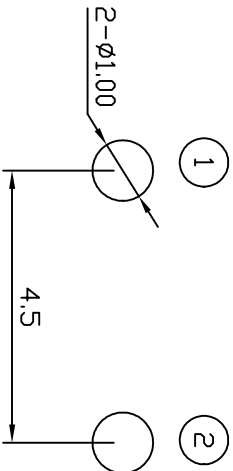

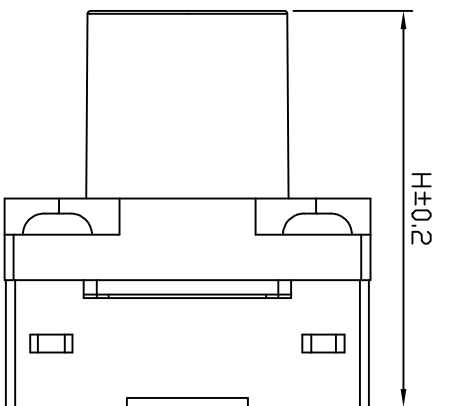


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

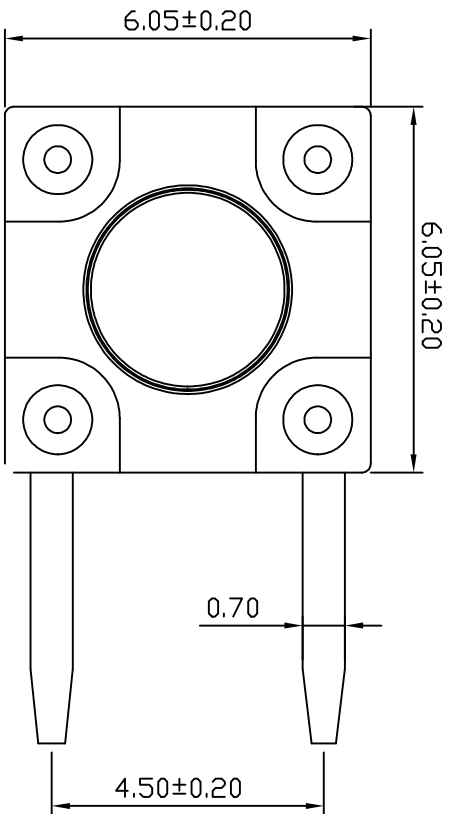

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C

Rating: 50mA, 12V DC Max

Insulation resistance: 100M Ω min, 100V DC


Dielectric strength: 250V, AC, 1Min

Contact resistance: 100m Ω Max

Life: 100,000 Cycles

Travel: 0.25 $\pm$ 0.10mm

Operating force: 250 $\pm$ 40gf

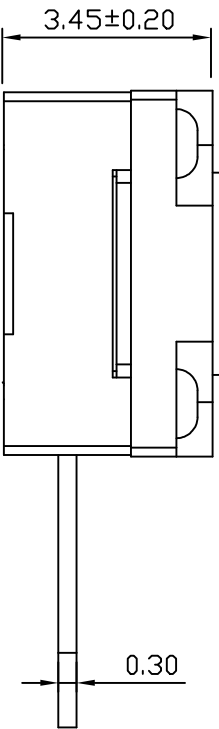

H	
4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5



TOLERANCE				DESIGN			
UNLESS OTHERWISE STATED				TITLE			
X.X	±0.20	SIZE	A4	DATE	2024.03.09	THCT58-C-R	Tact Switch
X.XX	±0.15	REV	A	DATE			
X.XXX	±0.10	UNIT	mm	DATE			
△	±2°	SCALE	8:1	DATE			



东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

