

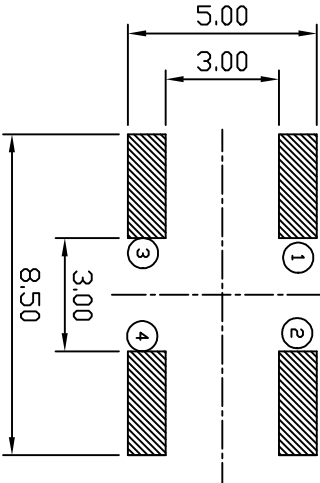
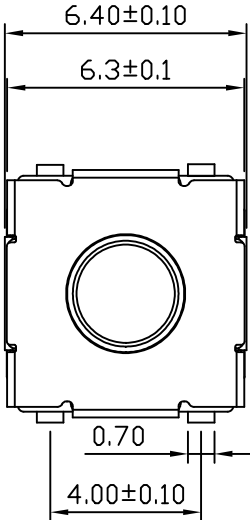




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.



P.C.B LAYOUT

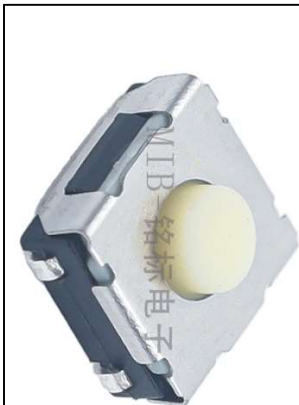

CIRCUIT

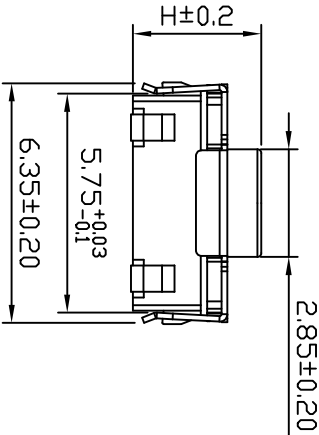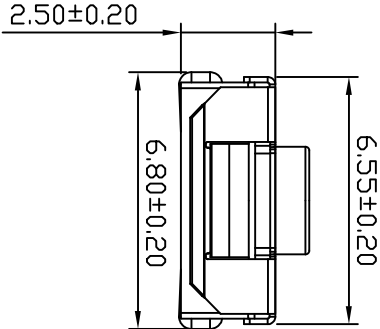

SPECIFICATIONS:

Operating temperature range:-20℃to+70℃
Rating:50mA DC12V Max
Insulation resistance:100MΩ min. 250V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:100mΩ Max
Life:1, 000, 000 Cycles
Travel:0.50±0.25mm
Operating force:250±40gf

H

3.13.5

3.84.3

4.54.8

5.25.5



ROHS COMPLIANT Pb-free Halogen free				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024. 03. 12	Tact Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TVCJ56-C-R
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
△	±2°	SCALE	5:1			PRINT DATE	2025.07.24