

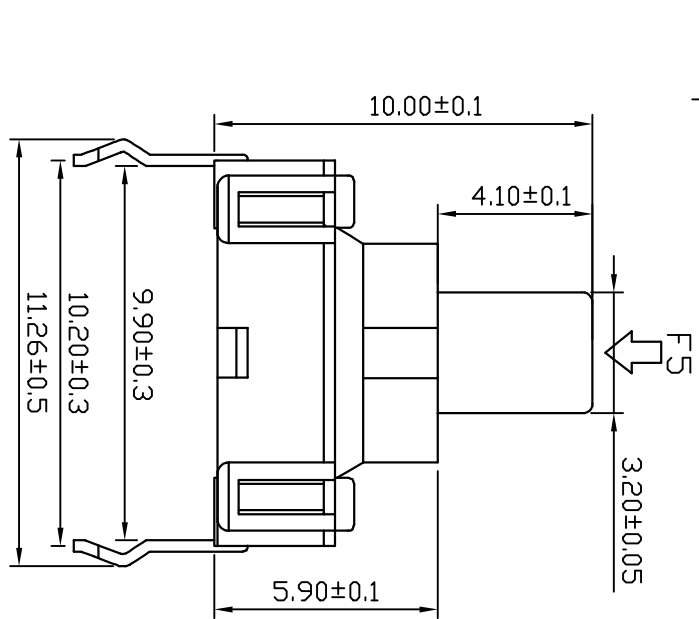
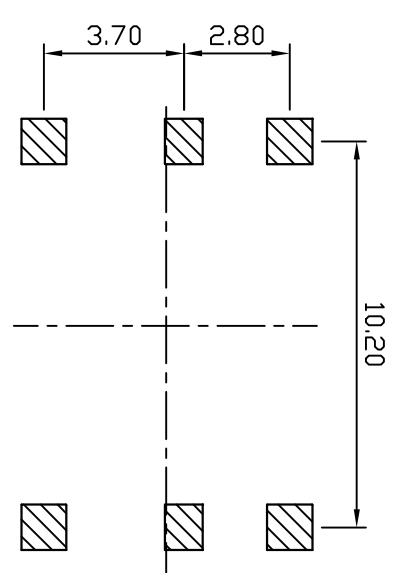
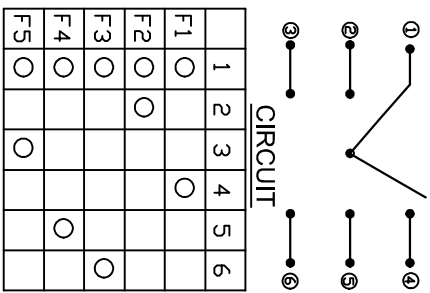


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

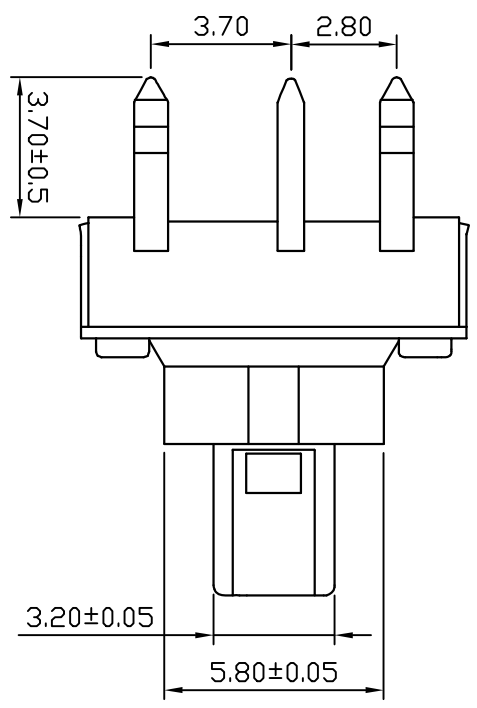

SPECIFICATIONS:

Operating temperature range: -25°C to +70°C
Rating: 50mA, 12V DC Max
Insulation resistance: 100MΩ min, 250V DC
Dielectric strength: 100V AC for 1min
Contact resistance: 100mΩ Max
Life: 50,000 Cycles
Operating force: Push direction: 250±50gf
Rotary 4-Direction: 4-150±50gf

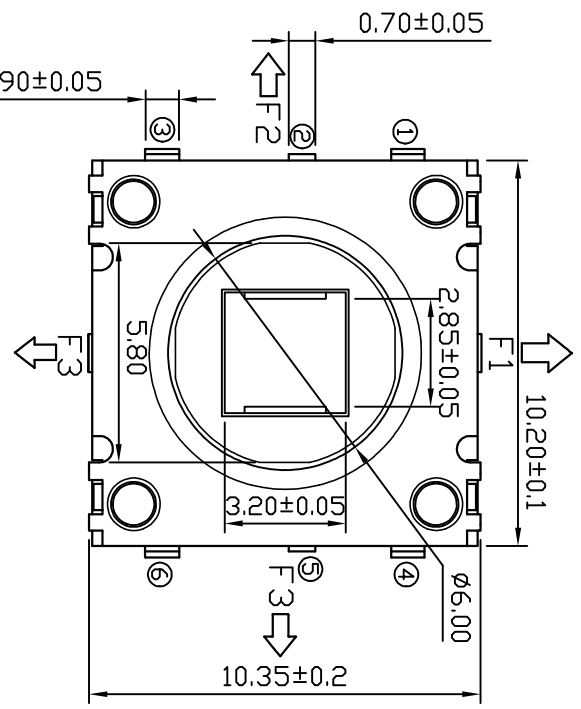

Rohs COMPLIANT Pb-Free			DESIGN DATE 2025.01.06			TITLE Multi-Function Switch		
UNLESS OTHERWISE STATED			DATE 2025.01.06			MODEL MVD03-100C-B		
X.X	±0.20	SIZE A4	DATE			SHEET 1/3		
X.XX	±0.15	REV A	DATE			PRINT DATE 2025.06.06		
X.XXX	±0.10	UNIT mm	SCALE 5:1					