
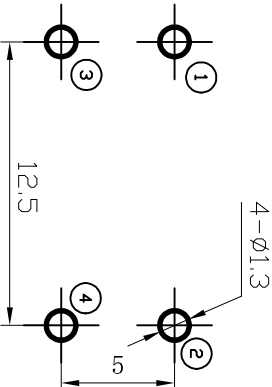
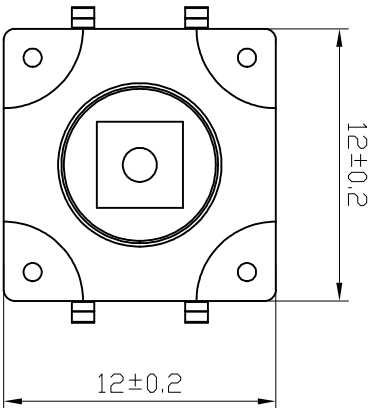

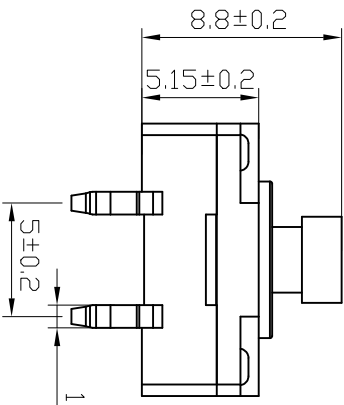


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

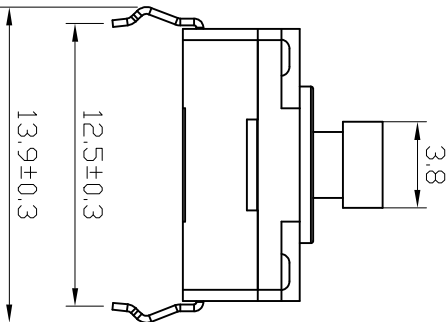

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range: -20°C to +70°C
Rating: 50mA DC/12V Max
Insulation resistance: 100M Ω min. 100V DC
Dielectric strength: 250V. AC. 1Min
Contact resistance: 100m Ω Max
Life: 100,000 Cycles
Travel: 0.45 $\pm$ 0.10mm
Operating force: 250 $\pm$ 40gf



ROHS COMPLIANT Pb-free				DESIGN DATE 2024.03.12				TITLE Tact Switch			
UNLESS OTHERWISE STATED				CHKD				MODEL TVDP05-C-R			
X.X	±0.20	SIZE	A4	DATE				SHEET 1/3			
X.XX	±0.15	REV	A	DATE				PRINT DATE 2025.05.26			
X.XXX	±0.10	UNIT	mm	SCALE 3:1							