本公司智慧财产未经许可不得复制
ming biao copyright,may not be used without permission from ming biao.

H
2.0
3.0
4.0

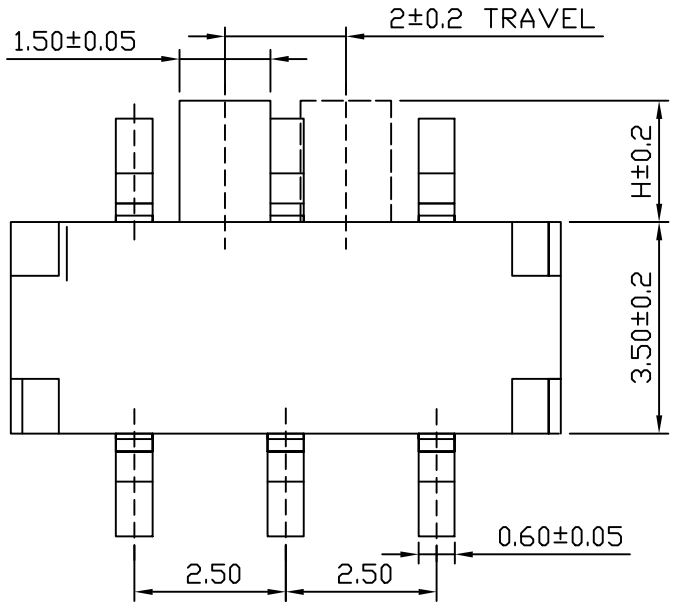

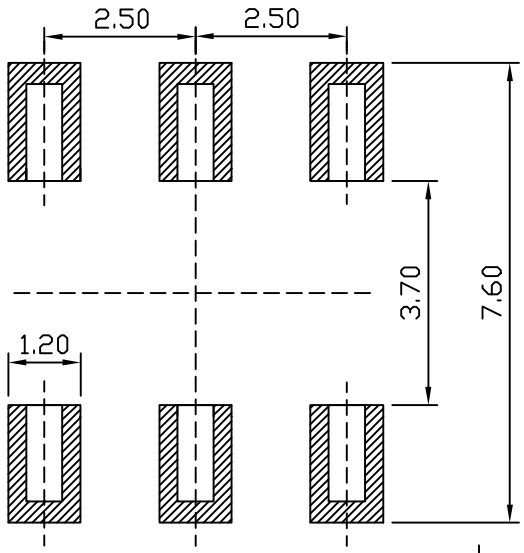

P.C.B LAYOUT



CIRCUIT

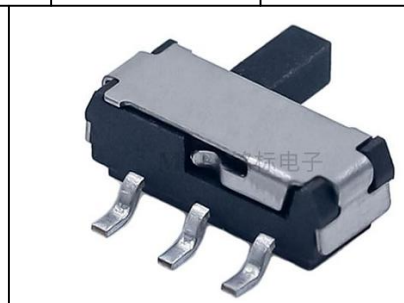

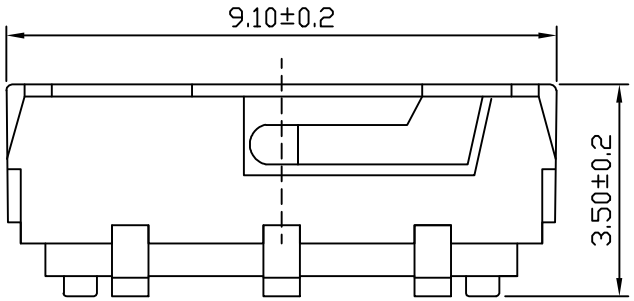

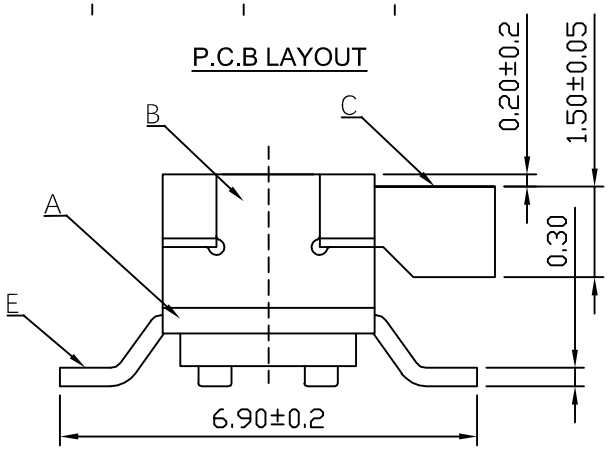

SPECIFICATIONS:

Operating temperature range:-10℃to+50℃
Rating:100mA.12V DC Max
Insulation resistance:50MΩ min.100V DC
Dielectric strength:250V.AC.1Min
Contact resistance:100mΩ Max
Life:10,000 Cycles
Travel:2±0.2mm
Operating force:200±80gf

NO	Name	Qty	Materil	Remarks
E	Terminal	6	Brass	Silver
D	Contact reed	2	Beryllium copper	Silver covere
C	Handle	1	PA46	Black
B	Cover	1	SUS	Silver
A	Base	1	9T	Black

MING BIAO 铭标 2024.06.17 ISSUED R&D DEPT

RoHS COMPLIANT Pb Pb-Free HF Halogen Free

东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co. ,Ltd.

TOLERANCE			
UNLESS OTHERWISE STATED			
X.X	±0.20	SIZE	A4
X.XX	±0.15	REV	A
X.XXX	±0.10	UNIT	mm
∠	±2°	SCALE	8:1

DESIGN	wyj	DATE	2024. 06. 17
CHKD		DATE	
APPD		DATE	

TITLE	Toggle switch
MODEL	QHCM03-F-R
SHEET	1/3
PRINT DATE	2025.06.09