
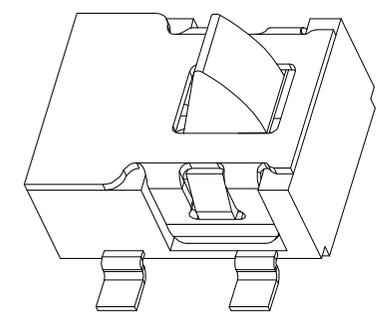
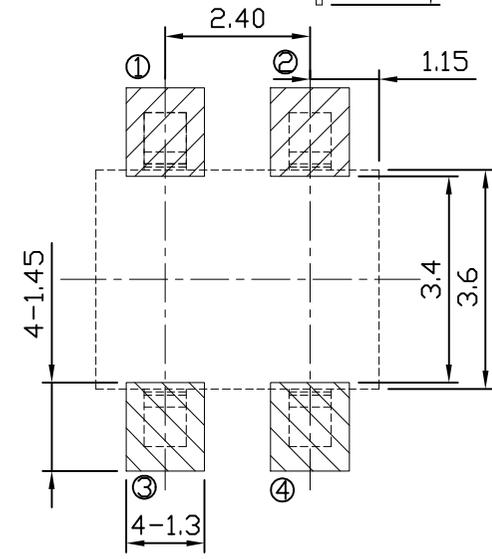
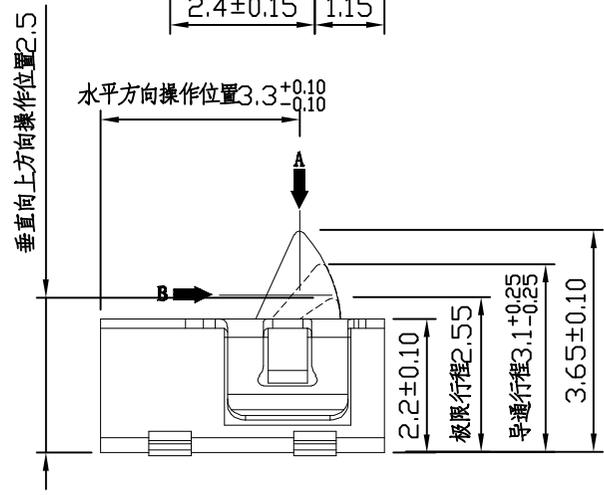

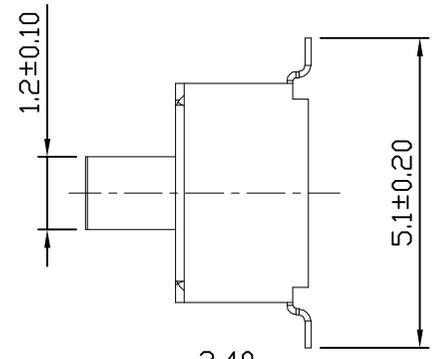


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

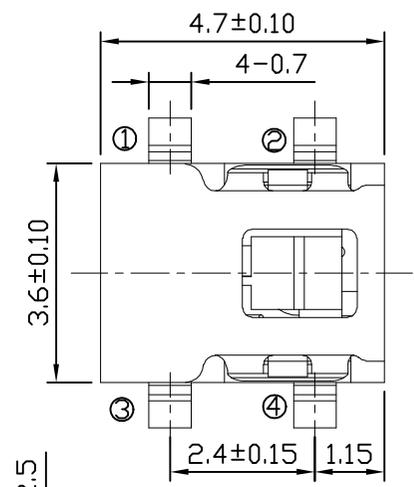

P.C.B LAYOUT

SPECIFICATIONS:

Operating temperature range:-10°Cto+60°C
 Rating:Max 10mA 3V DC
 Insulation resistance:50MΩ min. 100V DC
 Dielectric strength:250V. AC. 1Min
 Contact resistance:200mΩ Max
 Life:20,000 Cycles
 Operating force:30g±10g



		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.					
TOLERANCE UNLESS OTHERWISE STATED				DESIGN WYJ	DATE 2025.03.05	TITLE Detector Switch	
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LM-V-221T无柱
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm			PRINT DATE	2025.03.05
∠	±2°	SCALE	8:1				