



ming biao copyright,may not be used without permission from ming biao.





3D VIEW

1. CONTACT CURRENT RATING: 1A;
2. CONTACT RESISTANCE: 50 m Ω MAX.;
3. INSULATION RESISTANCE: 100M Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 6,000 CYCLES MIN.;
6. INSERTION FORCE: 0.5~2.5kgf (5~25N);
7. EXTRACTION FORCE: 0.5~2.5kgf (5~25N);
8. PRODUCT MEET THE REQUEST OF THE RoHS.





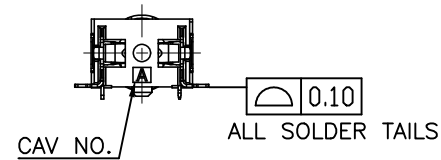


东莞市铭标电子科技有限公司
Ming Biao Electronic Technology Co., Ltd.

				DESIGN	DATE	TITLE	PHONE JACK	
TOLERANCE				WJ	2024. 09. 24			
UNLESS OTHERWISE STATED								
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	ST-275-S	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
	±2°	SCALE	2:1			PRINT DATE	2025.07.07	

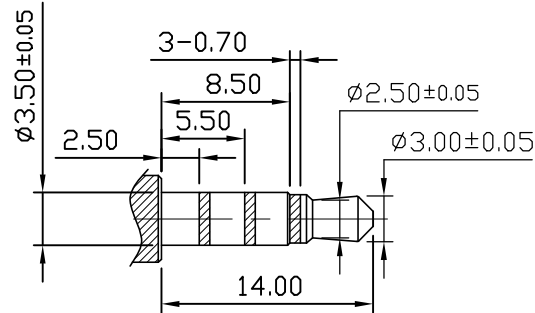

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

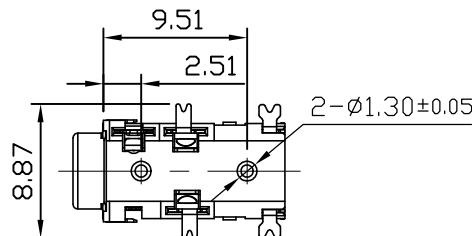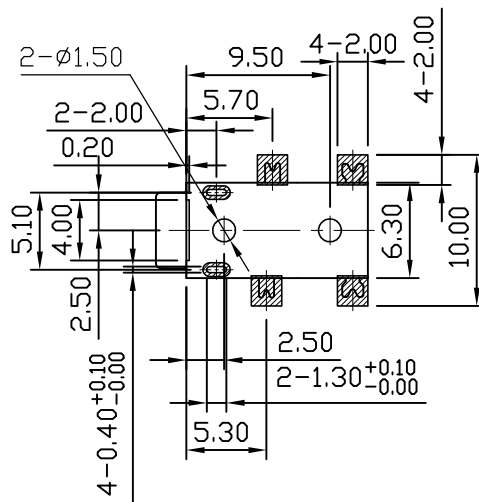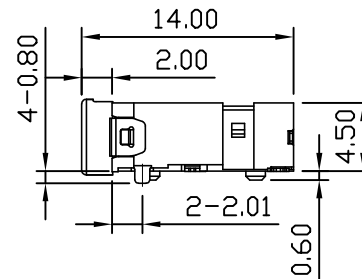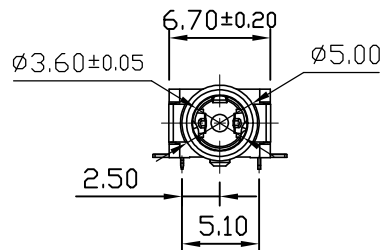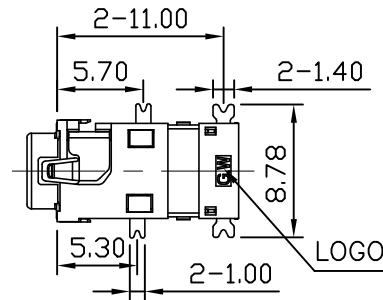

RECOMMENDED PCB LAYOUT
TOP VIEW TOL:±0.05

A

B

C

D

E

F

G

H