


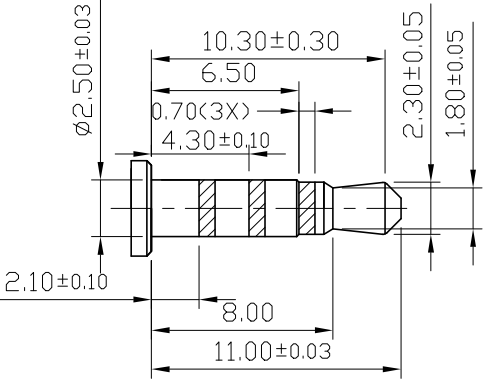
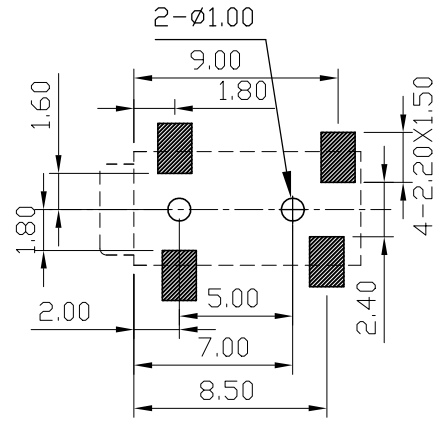


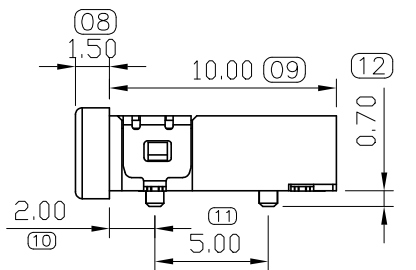


Ø2.50mm 4 POLE PLUG DETAIL DRAWING

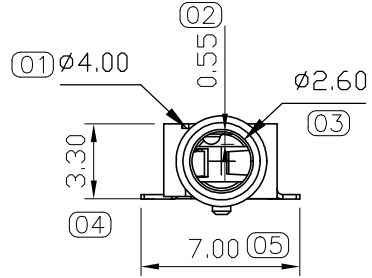


RECOMMENDED PCB LAYOUT

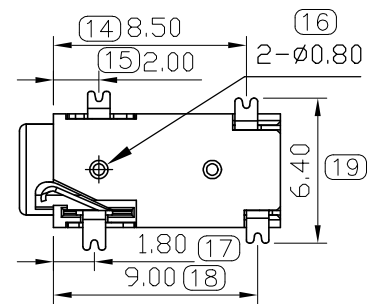


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

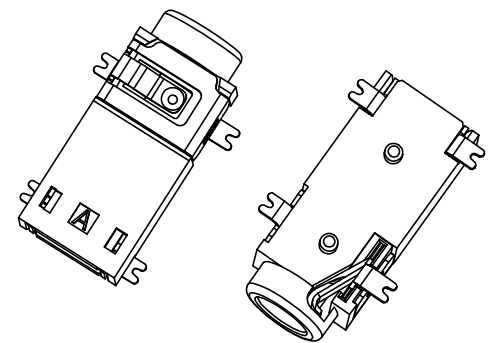

3D VIEW

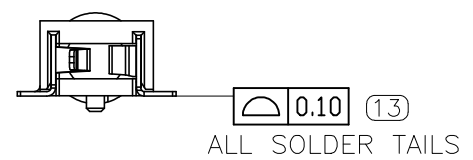

ALL SOLDER TAILS

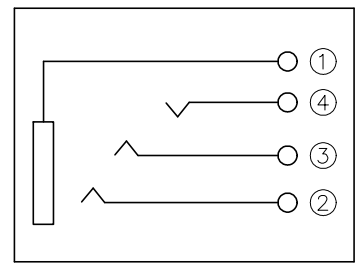


CIRCUIT

NOTES:

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 3.0~30.0N.;
- CONNECTOR UNMATING FORCES: 3.0~30.0N.;



  				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.								
TOLERANCE				DESIGN		DATE		TITLE		PHONE JACK		
UNLESS OTHERWISE STATED				wyy		2024. 09. 24						
X.X	±0.20	SIZE	A4	CHKD		DATE		MODEL		ST-348-S00-041B-R		
X.XX	±0.15	REV	A									
X.XXX	±0.10	UNIT	mm	APPD		DATE		SHEET		1/3		
	±2°	SCALE	3:1					PRINT DATE		2025.07.07		