
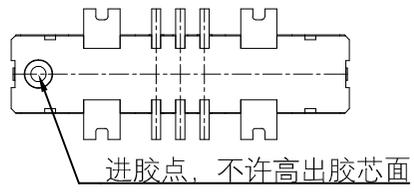
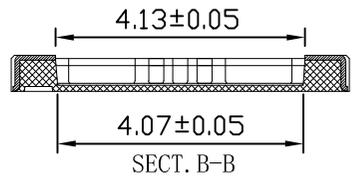
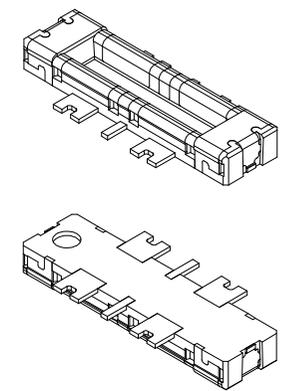
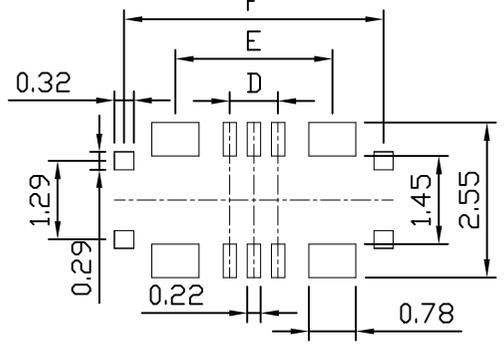
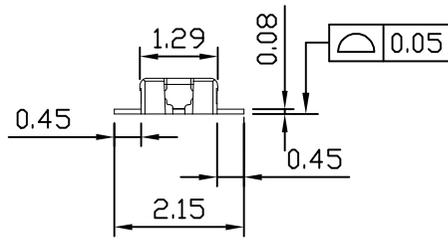
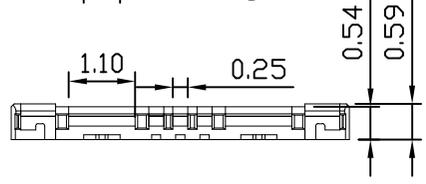

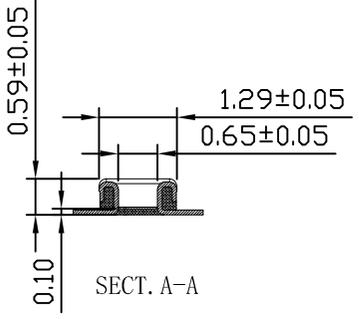
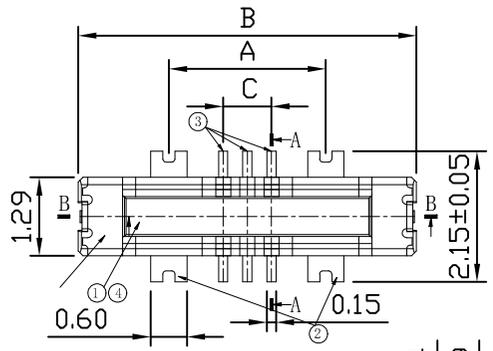


本公司智慧财产未经许可不得复制
ming biao copyright, may not be used without permission from ming biao.

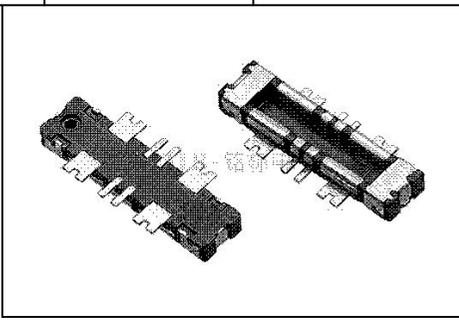

TABLE

NUMBER OF CONTACT	A	B	C	D	E	F
2	1.8	4.8	-	-	1.8	3.5
4	2.2	5.2	0.4	0.4	2.2	3.9
6	2.6	5.6	0.8	0.8	2.6	4.3

NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS
4	HOLD DOWN	2	COPPERALLOY	NICKEL 80u" MIN. OVER ALL	CONTACT AREA : NICKEL (80u" MIN)
3	SIGNAL CONTACT	N	COPPERALLOY	GOLD (3u" MIN.), NICKEL 80u" MIN. OVER ALL	CONTACT AREA : GOLD (3u" MIN)
2	POWER CONTACT	4	COPPERALLOY	GOLD (3u" MIN.), NICKEL 80u" MIN. OVER ALL	CONTACT AREA : GOLD (3u" MIN)
1	INSULATOR	1	LCP	--	--

- 备注:
1. 塑胶材质: LCP UL 94V-0 BLACK;
 2. 毛边最大0.03mm, 厚0.05mm;
 3. 产品不可有明显的缩水, 烧焦, 发白, 缺胶, 端子包胶等问题;
 4. 零件必须符合ROHS要求;
 5. △符号为QIP管控尺寸;
 6. 模穴号(A, B, C,);
 7. 中转收料10K PCS/盘;
 8. 产品几何中心位置不能设顶出位;
 9. 端子接地片共面度在0.05mm以内, 正面度0.02mm以内;
 10. 进胶口采用底部细水口进胶;



东莞市铭标电子科技有限公司
 Ming Biao Electronic Technology Co., Ltd.

TOLERANCE		DESIGN	DATE	TITLE	BTB
UNLESS OTHERWISE STATED		WYJ	2025.03.10		
X.X	±0.20	SIZE	A4	CHKD	DATE
X.XX	±0.15	REV	A		MODEL
X.XXX	±0.10	UNIT	mm	APPD	DATE
∠	±2°	SCALE	8:1		SHEET
					1/3
					PRINT DATE
					2025.03.10