

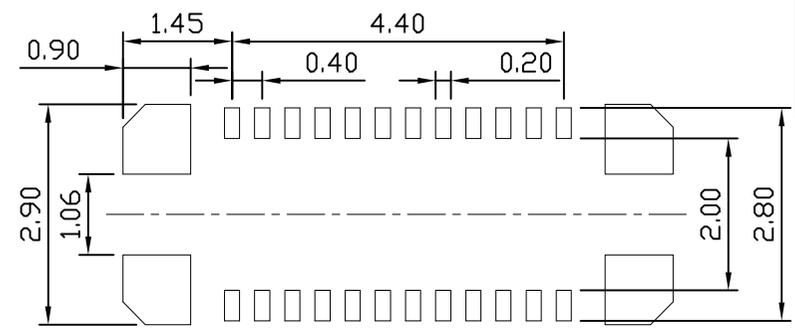
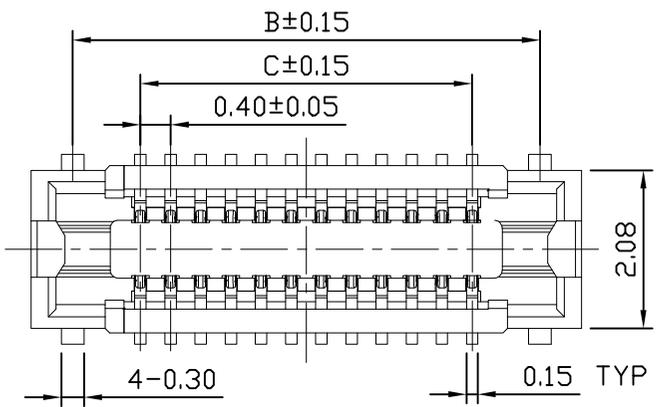
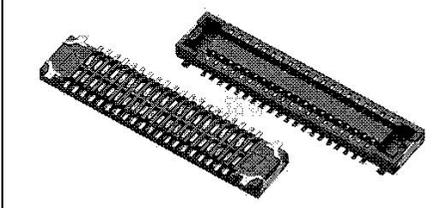


本公司智慧财产未经许可不得复制  
ming biao copyright, may not be used without permission from ming biao.



P.C.B LAYOUT

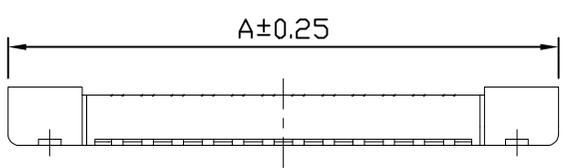

PIN NO.	A	B	C
10	4.50	3.40	1.60
12	4.90	3.80	2.00
14	5.30	4.20	2.10
16	5.70	4.60	2.80
20	6.50	5.40	3.60
24	7.30	6.20	4.40
30	8.50	7.40	5.60
34	9.30	8.20	6.40
40	10.50	9.40	7.60
44	11.30	10.20	8.40

SPECIFICATIONS:

- VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- WITHSTANDING VOLTAGE: 100V AC ONE MINUTE
- INSULATION RESISTANCE: 50MΩ MIN;
- CONTACT RESISTANCE: 100mΩ MAX;
- OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- INSULATOR: LCP UL 94V-0 BLACK;
- TERMINAL: COPPER ALLOY;
- METAL FITTINGS: COPPER ALLOY.

PLATING:

- TERMINAL: GOLD PLATING, NICKEL 50u" MIN. OVER ALJ.
- METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN



		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE		DESIGN	DATE	TITLE	BTB
UNLESS OTHERWISE STATED		<i>wyf</i>	2025.03.12		
X.X	±0.20	SIZE	A4	CHKD	DATE
X.XX	±0.15	REV	A		MODEL
X.XXX	±0.10	UNIT	mm	APPD	DATE
↖	±2°	SCALE	10:1		SHEET
					1/3
					PRINT DATE
					2025.03.12

